

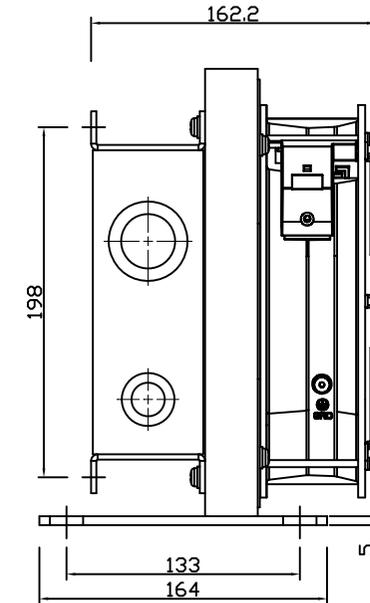
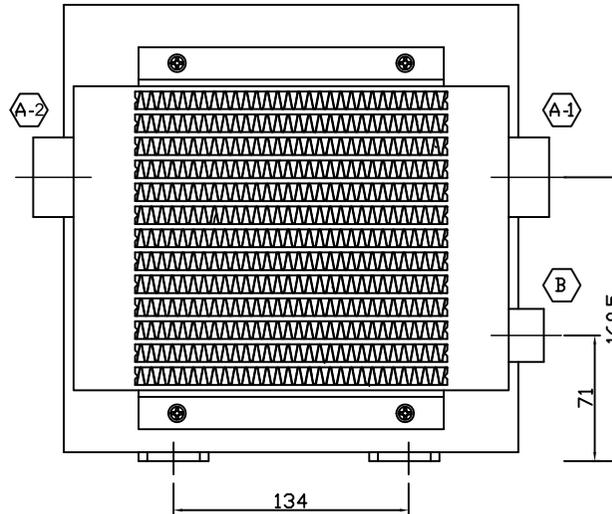
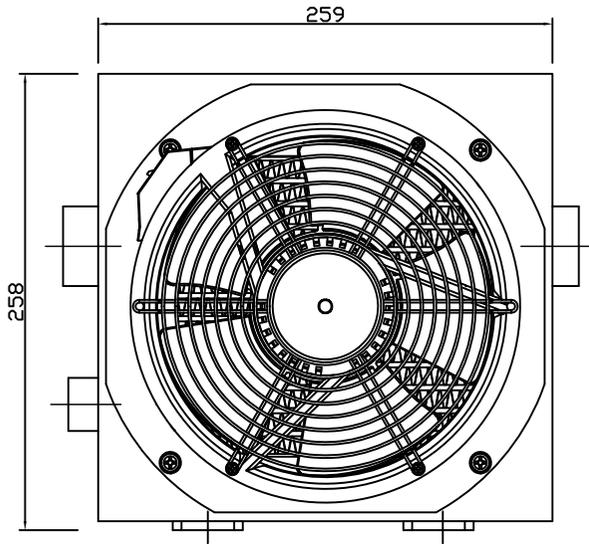
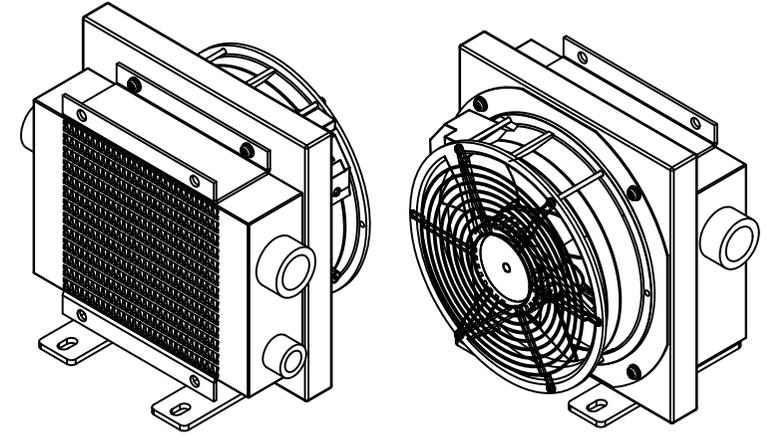
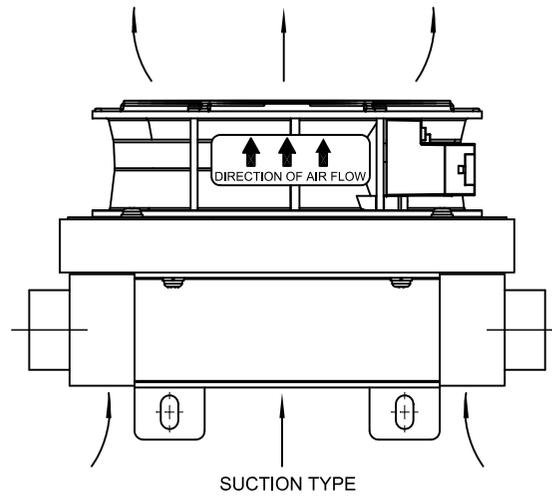


PORT SPECIFICATION		
NO.	PORT DESCRIPTION	SIZE
A-1	INLET	G1"
A-2	OUTLET	G1"
B	THERMO S/W PORT	G1/2"

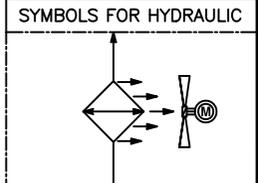

SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on ETD 40°C)	2,924 Kcal/h
Material of Matrix	ALUMINUM
Material of AC Motor (Frame / Impeller)	MAGNESIUM
< GENERAL SPECIFICATION OF AIR OIL FAN COOLER >	
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	10lit/min ~ 100lit/min
Phase & Poles of AC Motor	1Phase / 2 pole
Power of AC Motor	50 / 60hz, 0.25A / 0.28A
Voltage & Frequency of AC Motor	220V - 240VAC, 50/60Hz
Ingress Protection	IP 55
Certification of AC Motor	CE / UL / ROHS
Weight	6.5KG (Approx)

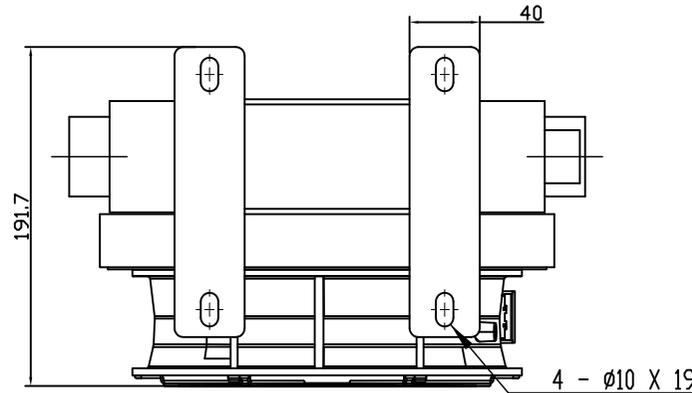

DESIGN				HydroLync		1 OF 1	
TITLE				AIR OIL COOLER		ISSUE DATE	
				HLA2 03-2 (220V. 50/60hz)			
DESIGN TEAM		PROJECTION METHOD		THIRD ANGLE PROJECTION		SCALE N / A	
DRWN	J.Y.MIN	19.10.17	PART NO.			A3 Q'TY	
CHK'D			DWG NO.			REV.	
REV'D							APP'D