

PORT SPECIFICATION


NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1"
(A-2)	OUTLET	G 1"
(B)	SPARE PORT	G 1/2"
(C)	THERMO S/W PORT	G 1"

[NOTICE]






(A-1) ↔ (B) : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER


Cooling Capacity (Based on ETD 40°C)	13,072Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Oil Flow	10lit/min ~ 150lit/min
Poles & Power of AC Motor	4 pole / 0.25KW
Voltage & Fequency of AC Motor	220/380V 60Hz
Insulation Class	F Class
Weight	24.5KG (Approx)

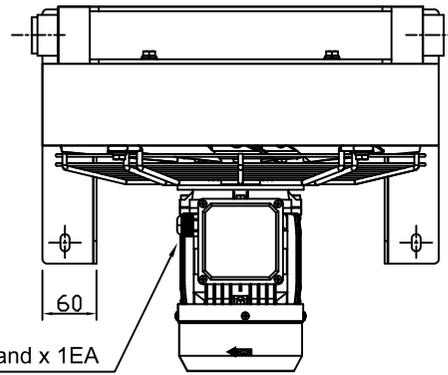


Cable Gland x 1EA
PG16 / M20x1.5

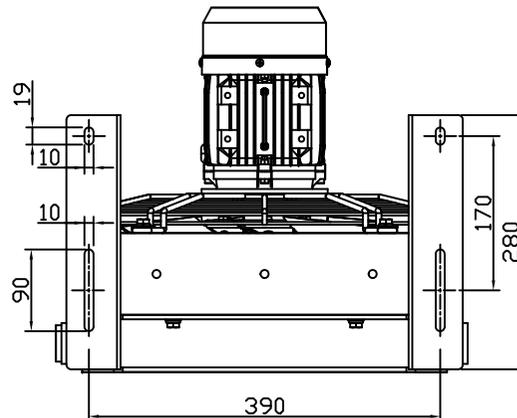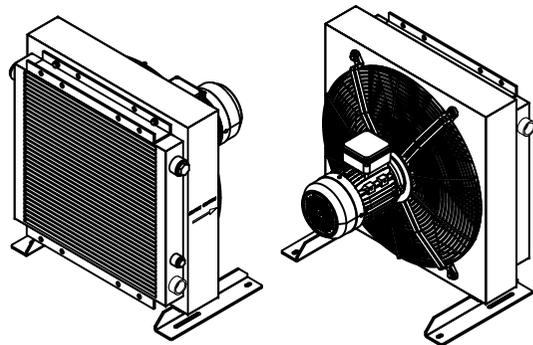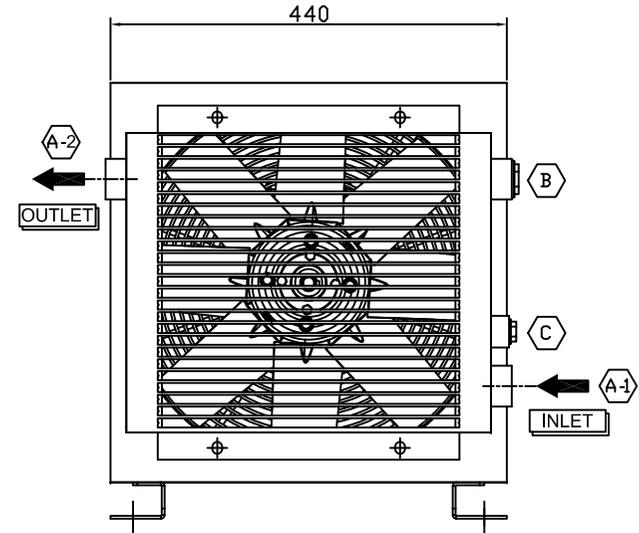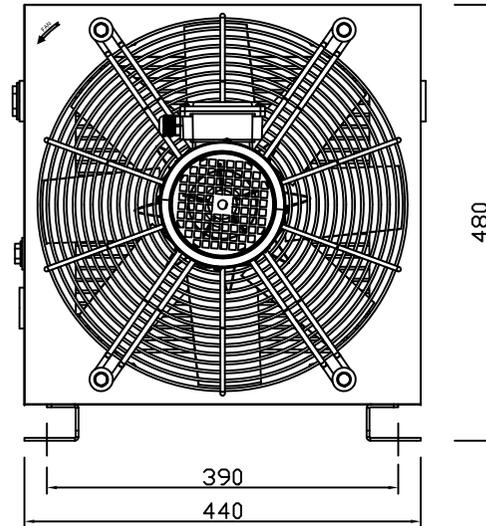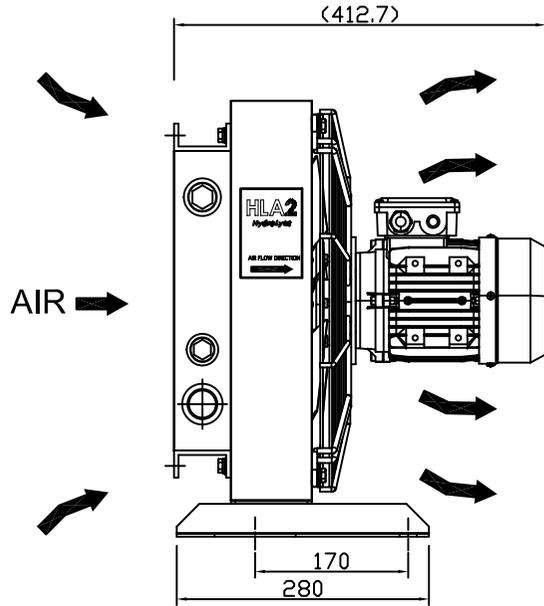

[ELECTRIC MOTOR CONNECTION DIAGRAM]

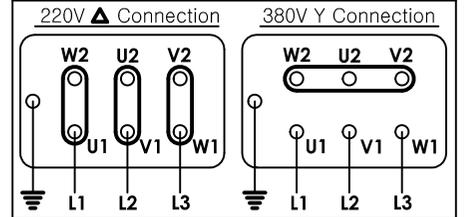

SYMBOLS FOR HYDRAULIC



DESIGN TEAM			PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A	A3
DRWN	J.Y.MIN	19.10.17					
CHK'D							
REV'D							
APP'D							
DWG. NO.							REV.

TITLE
AIR OIL COOLER
HLA2 11-4 (220/380V. 60hz)