

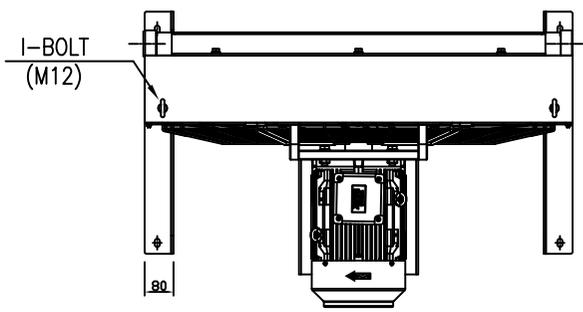
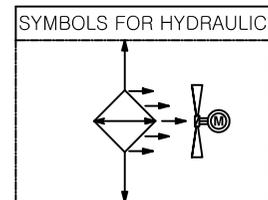
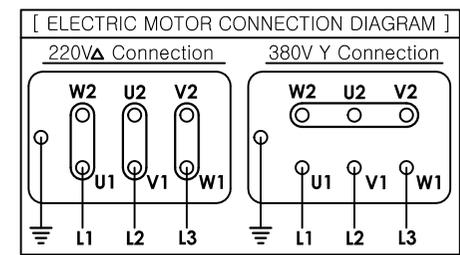
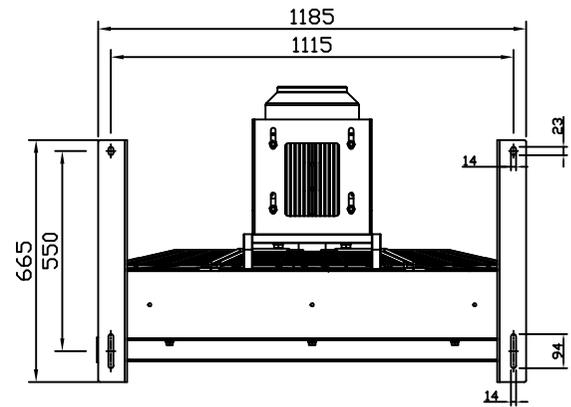
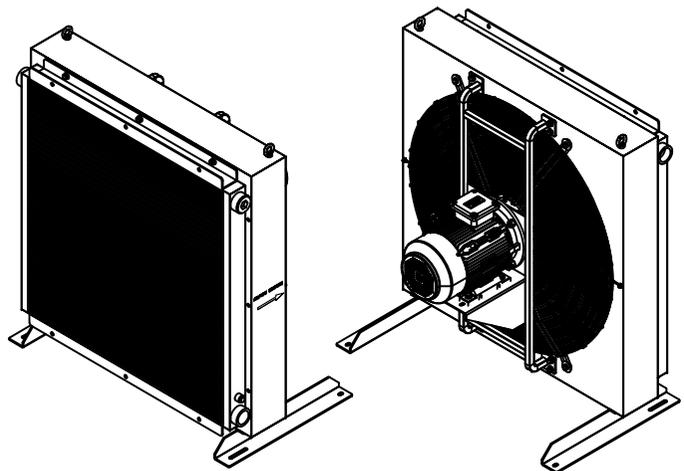
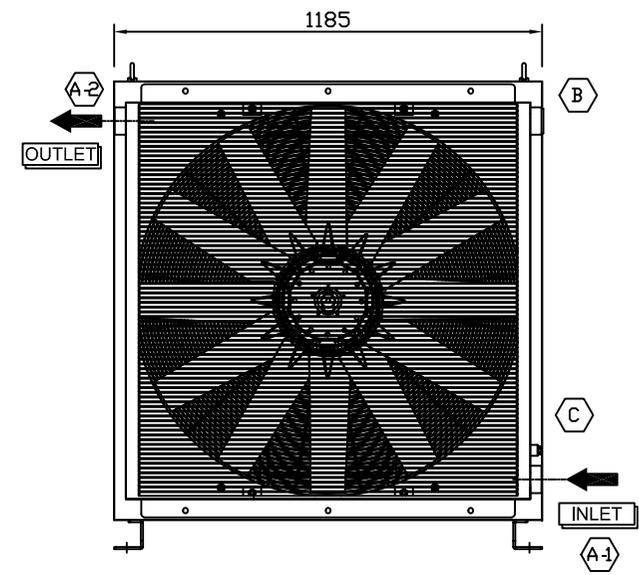


PORT SPECIFICATION		
NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 2"
(A-2)	OUTLET	G 2"
(B)	SPARE PORT	G 2"
(C)	THERMO S/W PORT	G 1/2"

[ NOTICE ]  
 (A-1) ↔ (B) : INCORRECT CONNECTION

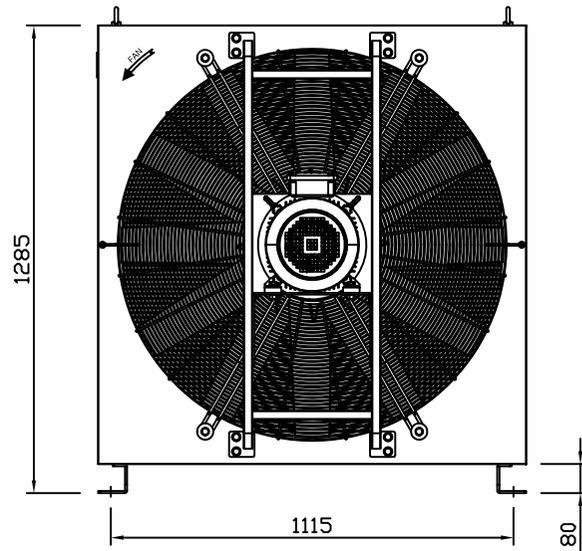

SPECIFICATION OF AIR OIL COOLER	
Cooling Capacity (Based on ETD 40°C)	82,560Kcal/h
Material of Matrix	Aluminum
< GENERAL SPECIFICATION OF AIR OIL FAN COOLER >	
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	75lit/min ~ 400lit/min
Poles & Power of AC Motor	6 pole / 5.5KW
Voltage & Fequency of AC Motor	220/380V 60Hz
Insullation Class	F Class
Noise (LpA, 1M)	90db
Weight	205KG (Approx)

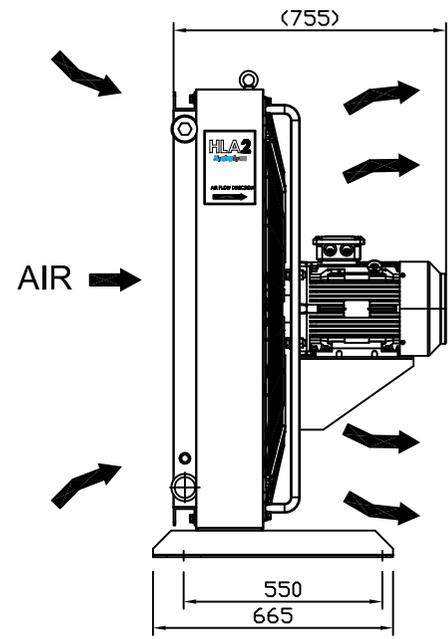

DESIGN **HydroLync** 1 OF 1

TITLE AIR OIL COOLER  
 HLA2 110-6 (220/380V, 60Hz) ISSUE DATE

DESIGN TEAM	PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A	A3
DRWN J.Y.MIN 19.10.17	PART NO.				QTY
CHK'D					
REV'D					
APP'D	DWG NO.				REV.