

PORT SPECIFICATION







NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 2"
(A-2)	OUTLET	G 2"
(B)	SPARE PORT	G 2"
(C)	THERMO S/W PORT	G 1/2"

[NOTICE]


(A-1) ↔ (B) : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER


Cooling Capacity (Based on ETD 40°C)	113,520Kcal/h
Material of Matrix	Aluminum
< GENERAL SPECIFICATION OF AIR OIL FAN COOLER >	
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	50lit/min ~ 500lit/min
Poles & Power of AC Motor	6 pole / 5.5KW
Voltage & Fequency of AC Motor	220/380V 60Hz
Insullation Class	F Class
Noise (LpA, 1M)	91db
Weight	197KG (Approx)

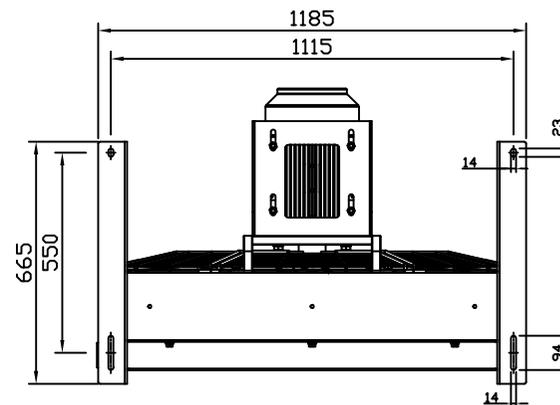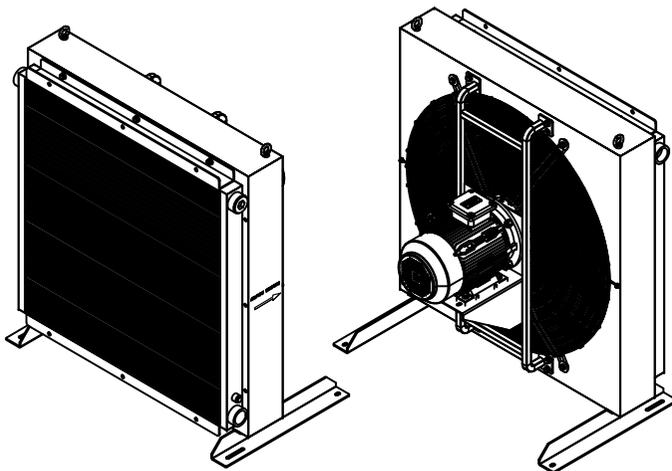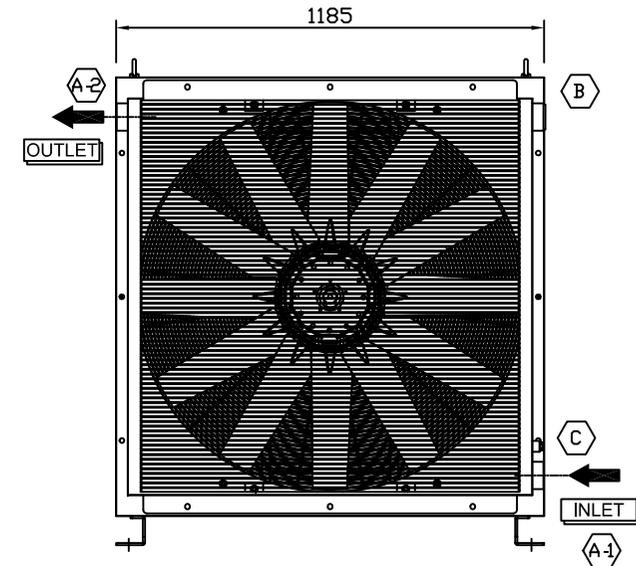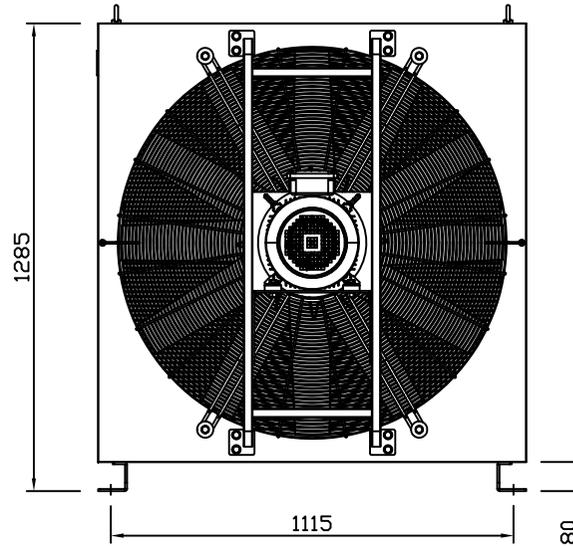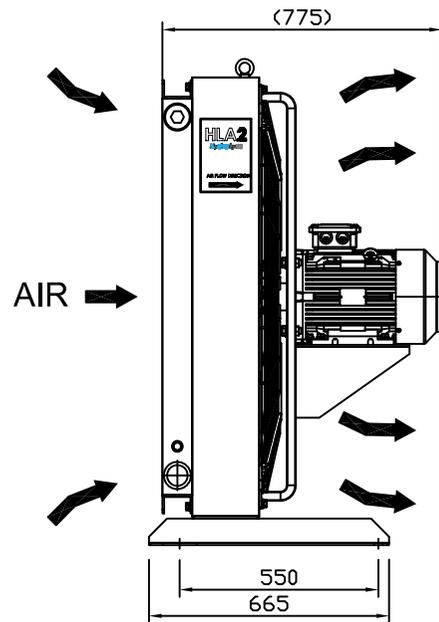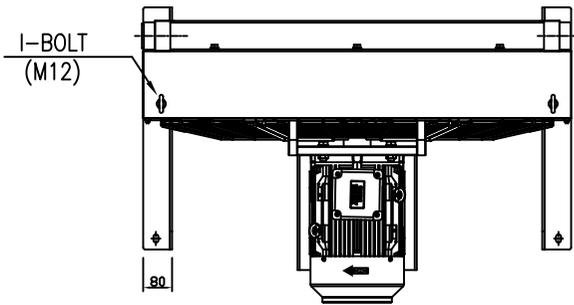

[ELECTRIC MOTOR CONNECTION DIAGRAM]

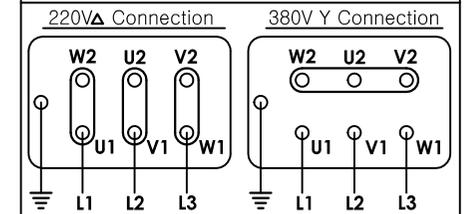

SYMBOLS FOR HYDRAULIC

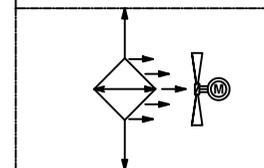

DESIGN				HydroLync		1 OF 1
TITLE						ISSUE DATE
AIR OIL COOLER						
HLA2 112-6 (220/380V, 60Hz)						
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A	A3
DRWN	J.Y.MIN	19.10.17				QTY
CHK'D						
REV'D						
APP'D			DWG NO.			REV.