
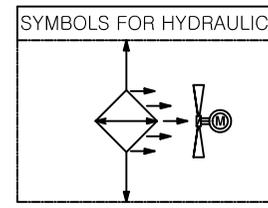
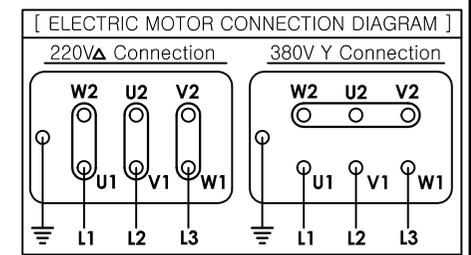
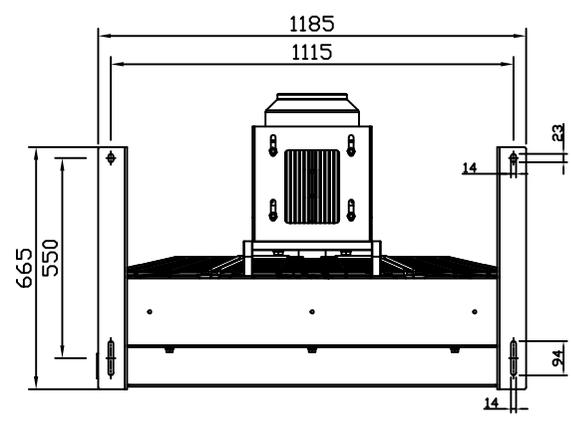
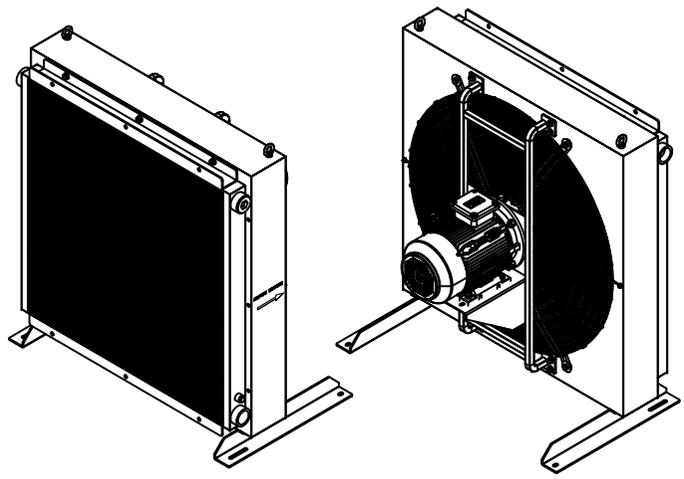
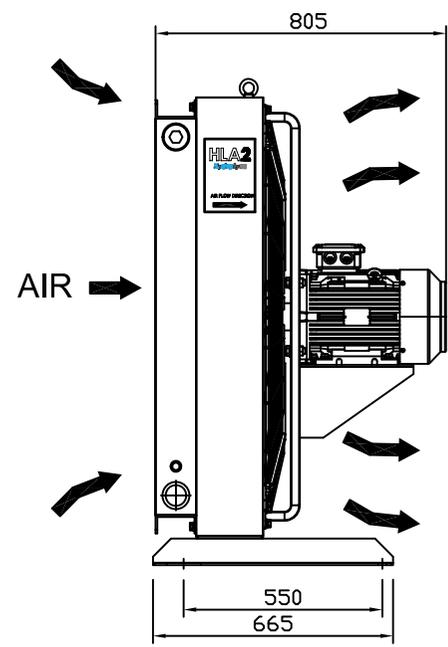
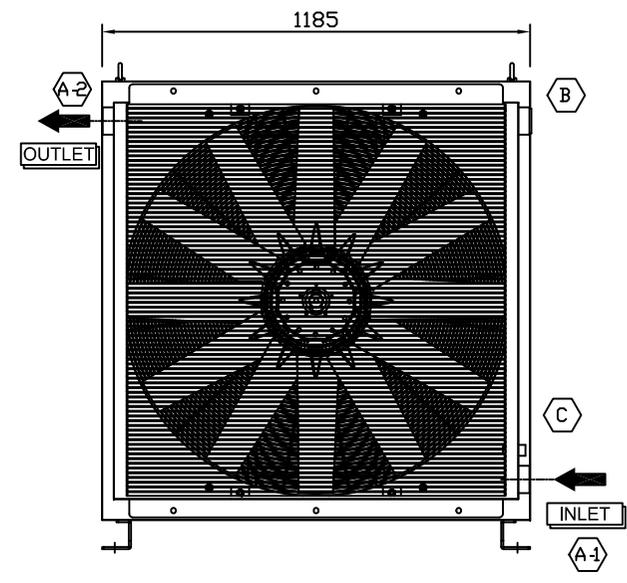
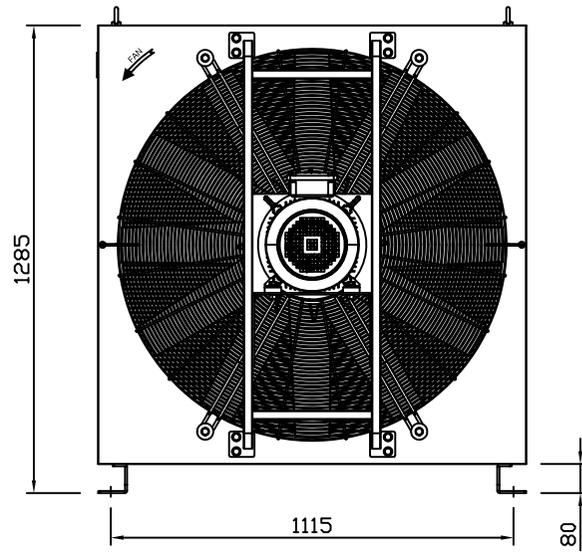


PORT SPECIFICATION		
NO.	PORT DESCRIPTION	SIZE
A-1	INLET	G 2"
A-2	OUTLET	G 2"
B	SPARE PORT	G 2"
C	THERMO S/W PORT	G 1/2"

[NOTICE]
 A-1 ↔ B : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER	
Cooling Capacity (Based on ETD 40°C)	144,480Kcal/h
Material of Matrix	Aluminum
< GENERAL SPECIFICATION OF AIR OIL FAN COOLER >	
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	50lit/min ~ 500lit/min
Poles & Power of AC Motor	6 pole / 5.5KW
Voltage & Fequency of AC Motor	220/380V 60Hz
Insulation Class	F Class
Noise (LpA, 1M)	95db
Weight	215KG (Approx)

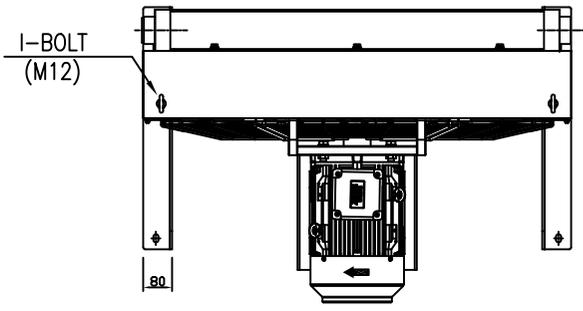

DESIGN **HydroLync** 1 OF 1

TITLE AIR OIL COOLER
HLA2 113-6 (220/380V, 60Hz) ISSUE DATE

DESIGN TEAM	PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A	A3
DRWN J.Y.MIN 19.10.17	PART NO.				QTY
CHK'D					
REV'D					
APP'D	DWG NO.				REV.