







PORT SPECIFICATION		
NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1"
(A-2)	OUTLET	G 1"
(B)	SPARE PORT	G 1"
(C)	THERMO S/W PORT	G 1/2"

[NOTICE]
 (A-1) ↔ (B) : INCORRECT CONNECTION

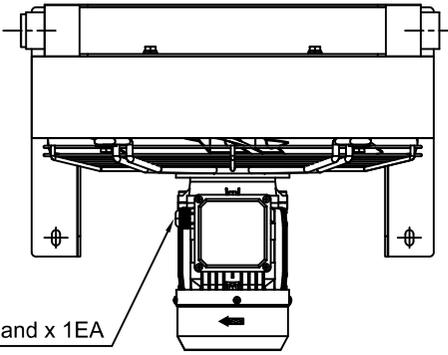


SPECIFICATION OF AIR OIL COOLER


Cooling Capacity (Based on ETD 40°C)	15,308Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Oil Flow	10lit/min ~ 200lit/min
Poles & Power of AC Motor	6 pole / 0.18KW
Voltage & Fequency of AC Motor	220/380V 60Hz
Insulation Class	F Class
Weight	29KG (Approx)

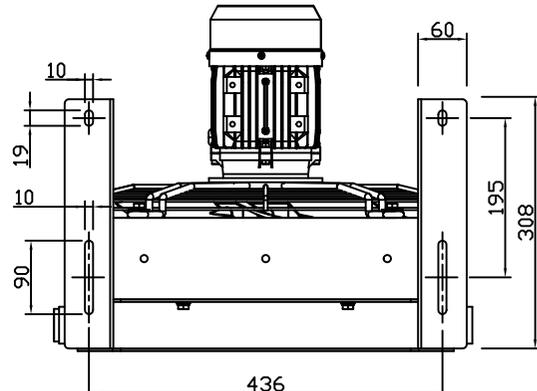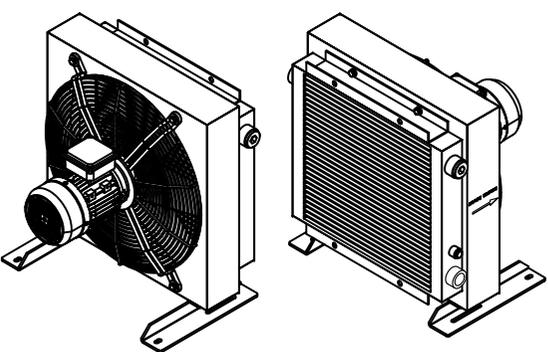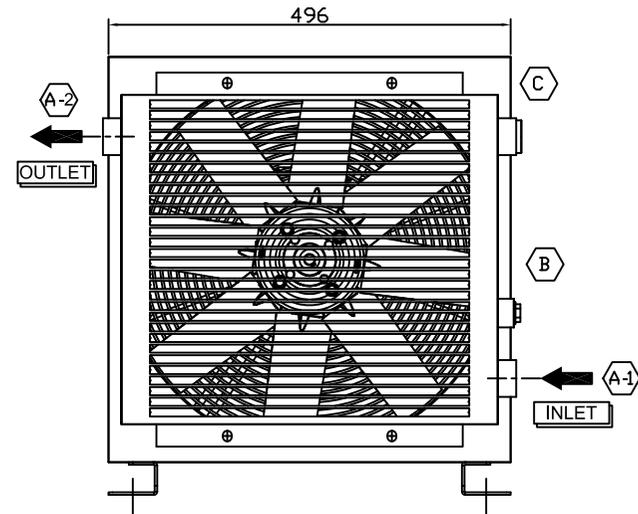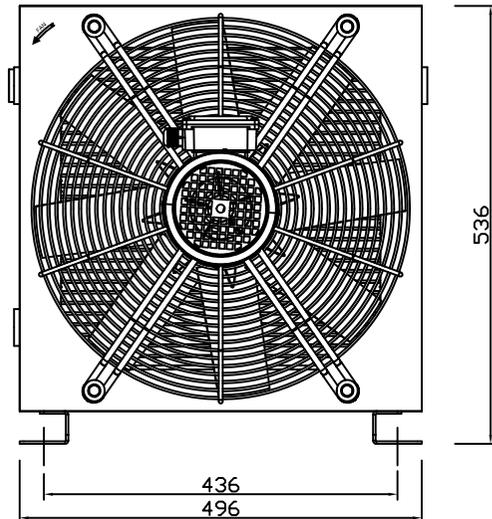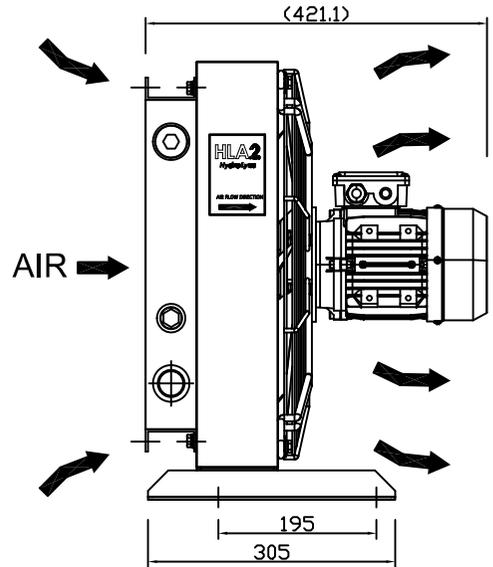

[ELECTRIC MOTOR CONNECTION DIAGRAM]

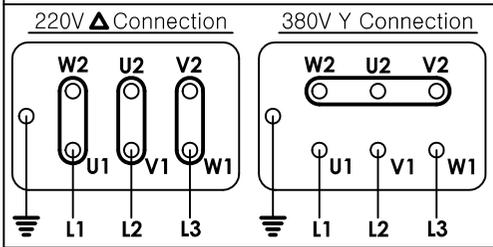

SYMBOLS FOR HYDRAULIC

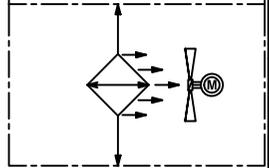

DESIGN **Hydro Lync** 1 OF 1

TITLE AIR OIL COOLER
 HLA2 16-6 (220/380V. 60hz) ISSUE DATE

DESIGN TEAM	PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A	A3
DRWN J.Y.MIN 19.10.17	PART NO.				QTY
CHK'D					
REV'D					
APP'D		DWG NO.			REV.