

PORT SPECIFICATION


NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1"
(A-2)	OUTLET	G 1"
(B)	SPARE PORT	G 1"
(C)	THERMO S/W PORT	G 1/2"

[ NOTICE ]






(A-1) ↔ (B) : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER


Cooling Capacity (Based on ETD 40°C)	27,520Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Oil Flow	25lit/min ~ 200lit/min
Poles & Power of AC Motor	4 pole / 0.75KW
Voltage & Fequency of AC Motor	220/380V 60Hz
Insulation Class	F Class
Weight	39KG (Approx)

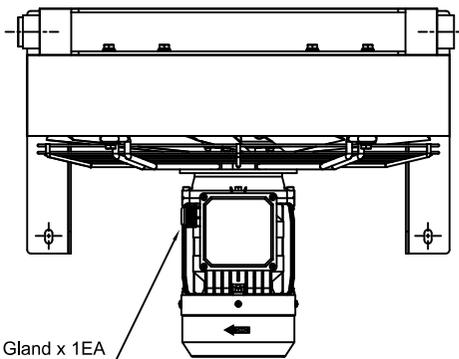


Cable Gland x 1EA  
PG16 / M20x1.5

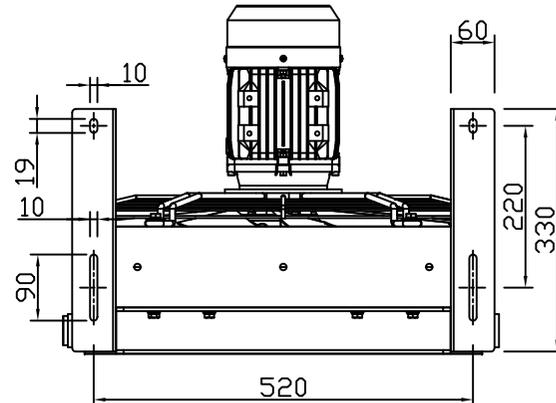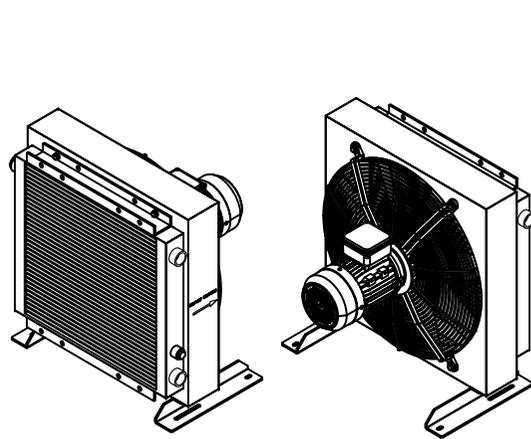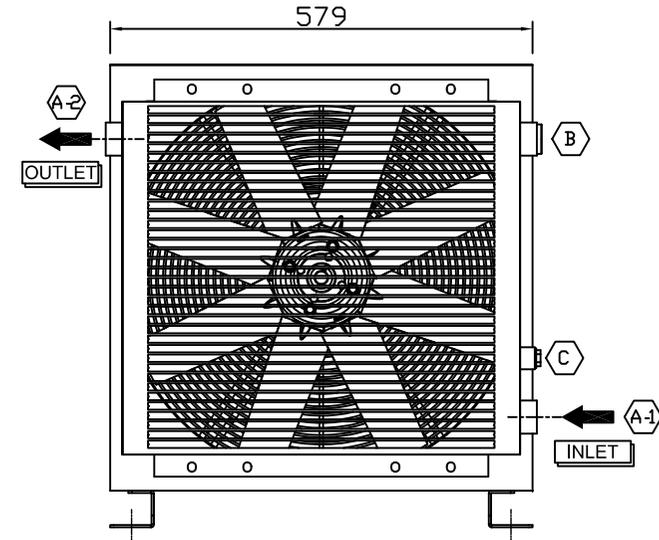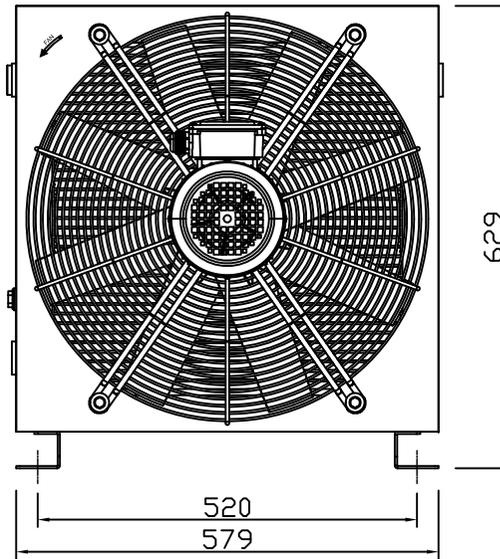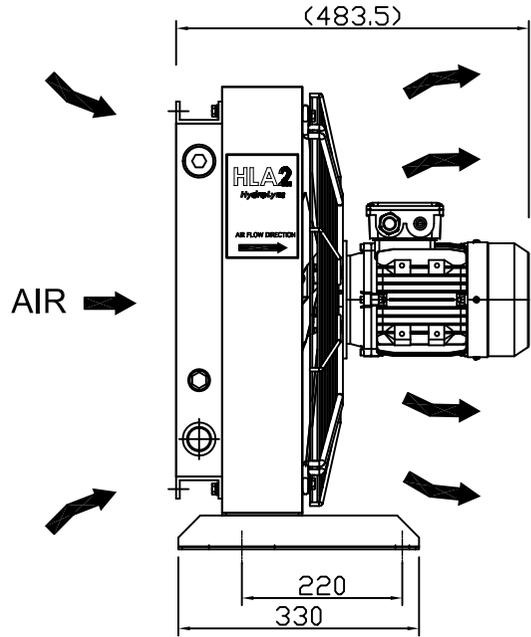

[ ELECTRIC MOTOR CONNECTION DIAGRAM ]

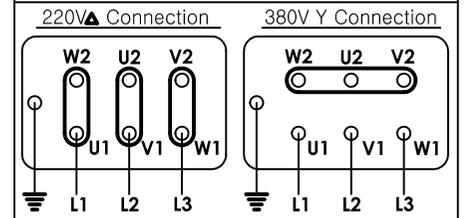

SYMBOLS FOR HYDRAULIC

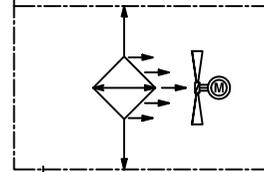

1 OF 1

DESIGN TEAM			PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A	ISSUE DATE
DRWN	J.Y.MIN	19.10.17	-	-	-	-	-
CHK'D							
REV'D							
APP'D			DWG NO.				REV.

TITLE: AIR OIL COOLER  
HLA2 23-4 (220/380V. 60hz)