


PORT SPECIFICATION

NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1"
(A-2)	OUTLET	G 1"
(B)	SPARE PORT	G 1"
(C)	THERMO S/W PORT	G 1/2"

[NOTICE]






(A-1) ↔ (B) : INCORRECT CONNECTION

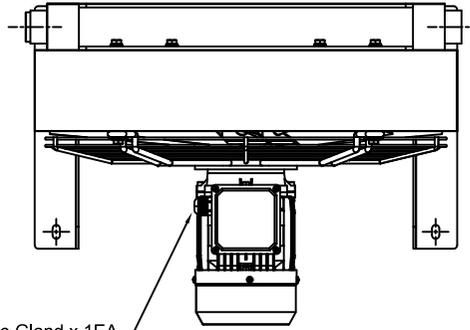


Cable Gland x 1EA
PG16 / M20x1.5

SPECIFICATION OF AIR OIL COOLER


Cooling Capacity (Based on ETD 40°C)	20,812Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Oil Flow	25lit/min ~ 200lit/min
Poles & Power of AC Motor	6 pole / 0.18KW
Voltage & Fequency of AC Motor	220/380V 60Hz
Insullation Class	F Class
Weight	34KG (Approx)

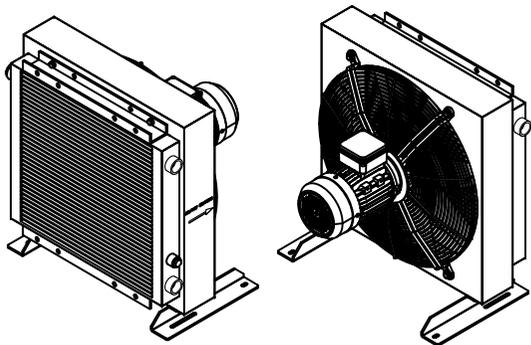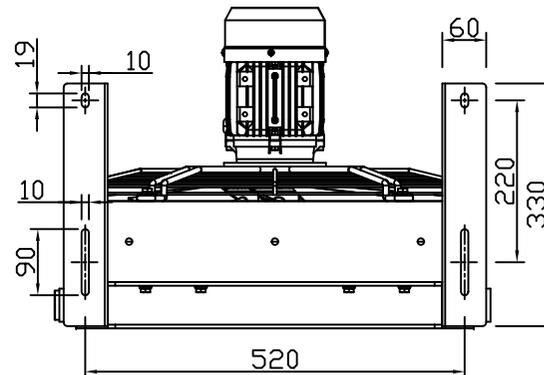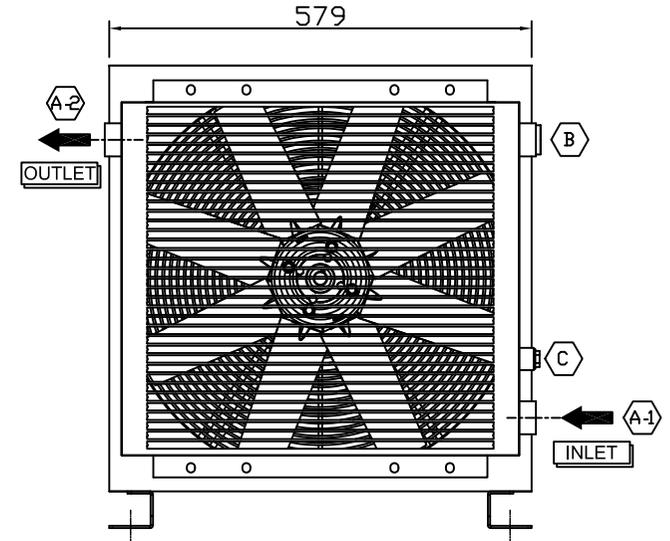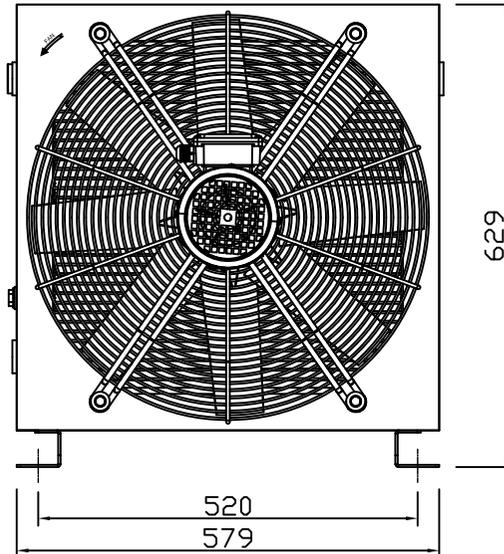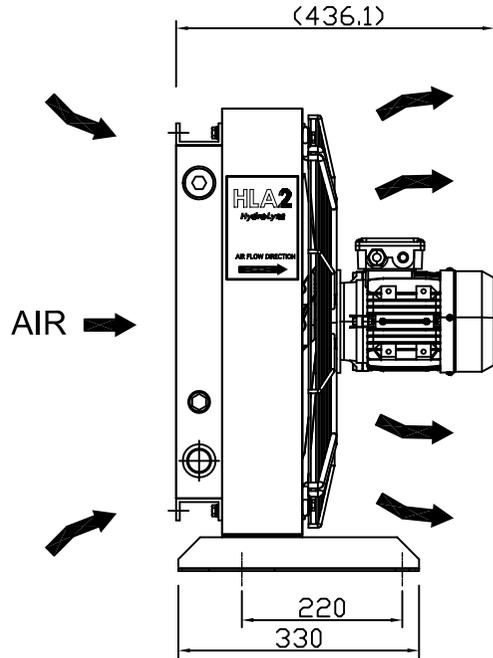

[ELECTRIC MOTOR CONNECTION DIAGRAM]

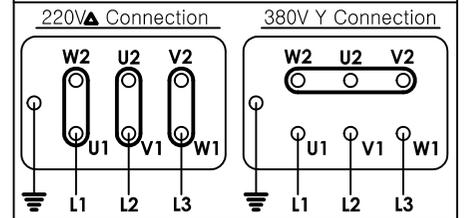

SYMBOLS FOR HYDRAULIC

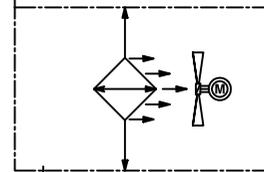

1 OF 1

DESIGN TEAM			PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A	ISSUE DATE
DRWN	J.Y.MIN	19.10.17					
CHK'D							
REV'D							
APP'D			DWG NO.				REV.

TITLE
AIR OIL COOLER
HLA2 23-6 (220/380V. 60hz)

QTY

REV.

AS(420X297)