

PORT SPECIFICATION






NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1 1/4"
(A-2)	OUTLET	G 1 1/4"
(B)	SPARE PORT	G 1 1/4"
(C)	THERMO S/W PORT	G 1/2"

[NOTICE]


(A-1) ↔ (B) : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER


Cooling Capacity (Based on ETD 40°C)	37,840Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Oil Flow	25lit/min ~ 300lit/min
Poles & Power of AC Motor	4 pole / 2.2KW
Voltage & Fequency of AC Motor	220/380V 60Hz
Weight	63.5KG (Approx)

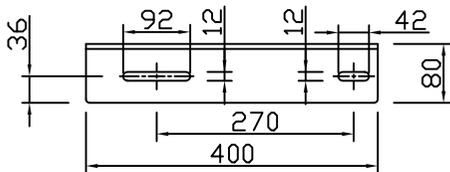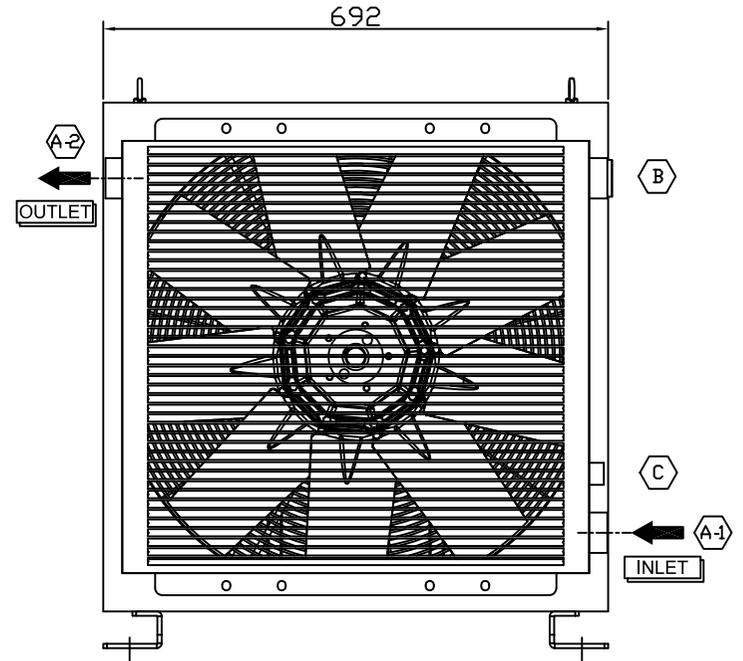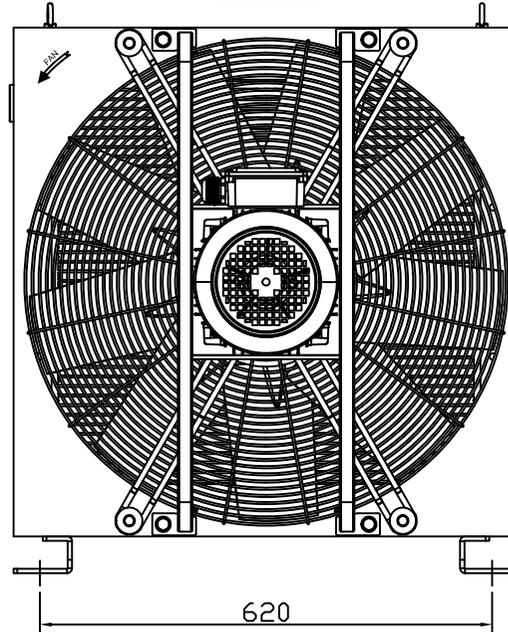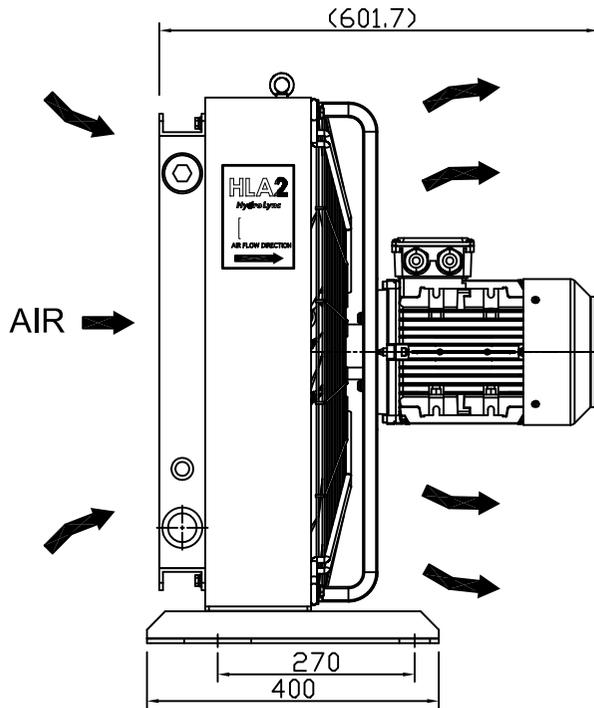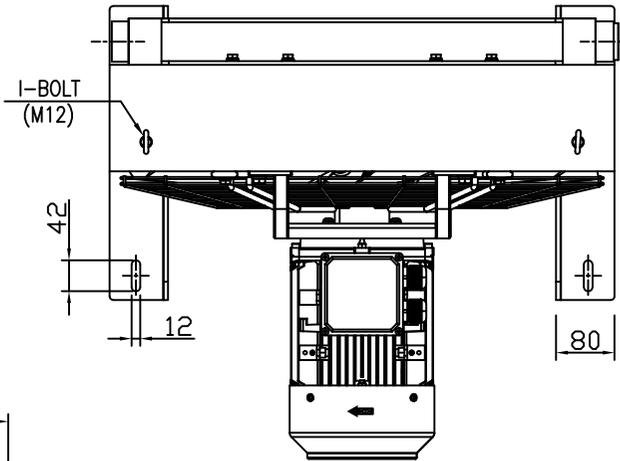


DETAIL FOR COOLER BRACKET SLOT HOLE

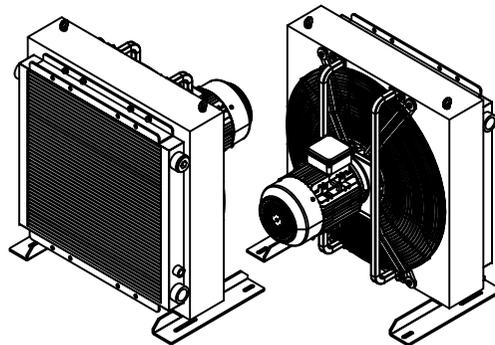

[ELECTRIC MOTOR CONNECTION DIAGRAM]

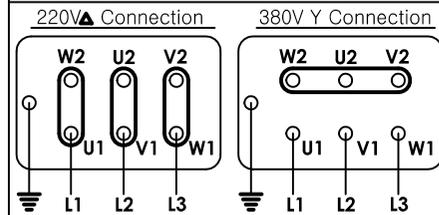

SYMBOLS FOR HYDRAULIC

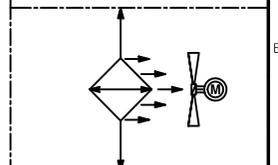

DESIGN		1 OF 1	
TITLE		AIR OIL COOLER	
		HLA2 33-4 (220/380V, 60hz)	
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION
DRWN	J.Y.MIN 19.10.17	PART NO.	SCALE N / A
CHK'D			QTY
REV'D		DWG NO.	REV.
APP'D			