


PORT SPECIFICATION

NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1 1/4"
(A-2)	OUTLET	G 1 1/4"
(B)	SPARE PORT	G 1 1/4"
(C)	THERMO S/W PORT	G 1/2"





[ NOTICE ]

(A-1) ↔ (B) : INCORRECT CONNECTION

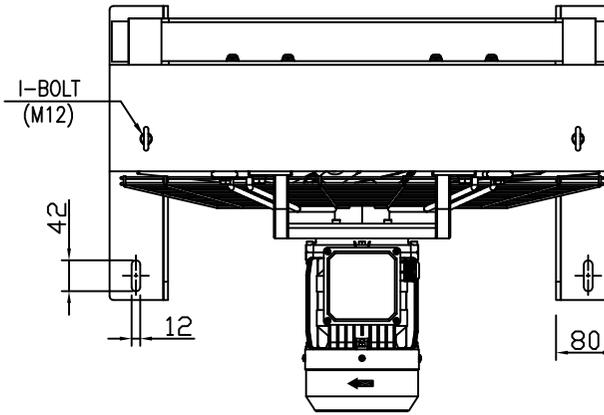


SPECIFICATION OF AIR OIL COOLER


Cooling Capacity (Based on ETD 40°C)	29,240Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Oil Flow	25lit/min ~ 300lit/min
Poles & Power of AC Motor	6 pole / 0.55KW
Voltage & Fequency of AC Motor	220/380V. 60Hz
Insulation Class	F Class
Weight	49KG (Approx)

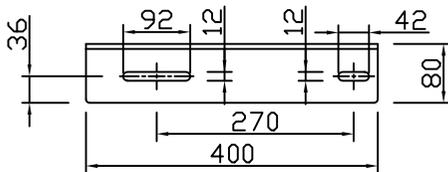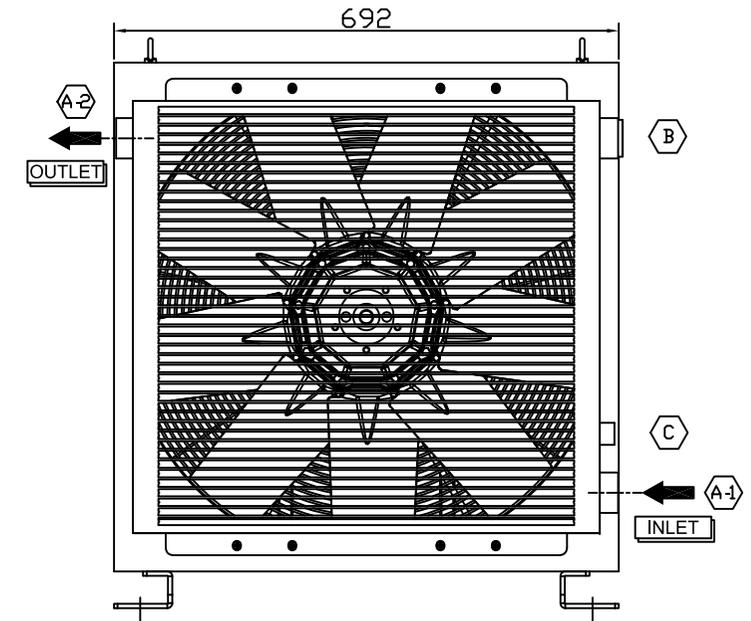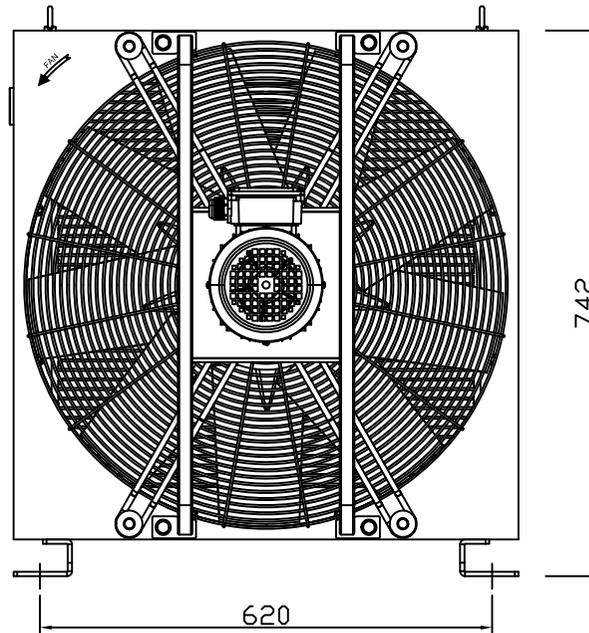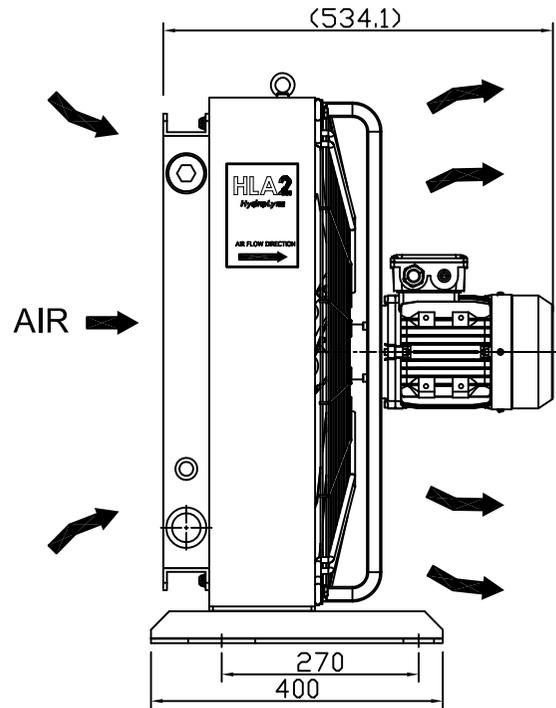


DETAIL FOR COOLER BRACKET SLOT HOLE

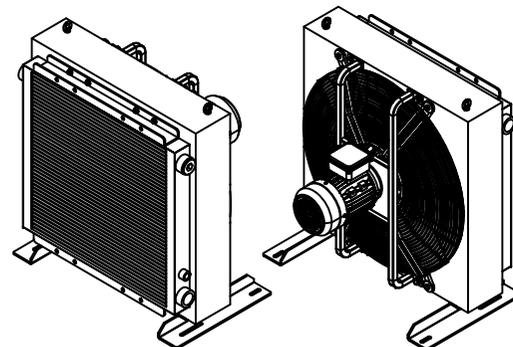

[ ELECTRIC MOTOR CONNECTION DIAGRAM ]

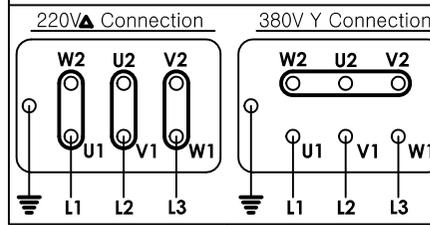

SYMBOLS FOR HYDRAULIC



DESIGN		1 OF 1	
TITLE			ISSUE DATE
AIR OIL COOLER			
HLA2 33-6 (220/380V. 60hz)			
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION
DRWN	J.Y.MIN 19.10.17	PART NO.	SCALE N / A
CHK'D			A3
REV'D		DWG NO.	QTY
APP'D			REV.