

PORT SPECIFICATION






NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1 1/2"
(A-2)	OUTLET	G 1 1/2"
(B)	SPARE PORT	G 1 1/2"
(C)	THERMO S/W PORT	G 1/2"

[NOTICE]


(A-1) ↔ (B) : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER


Cooling Capacity (Based on ETD 40°C)	41,280Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Oil Flow	25lit/min ~ 350lit/min
Poles & Power of AC Motor	6 pole / 0.55KW
Voltage & Fequency of AC Motor	220/380V. 60Hz
Insulation Class	F Class
Weight	54.9KG (Approx)

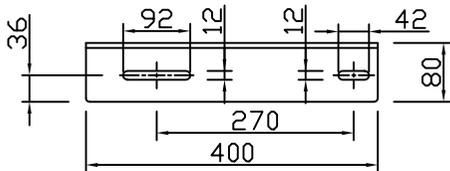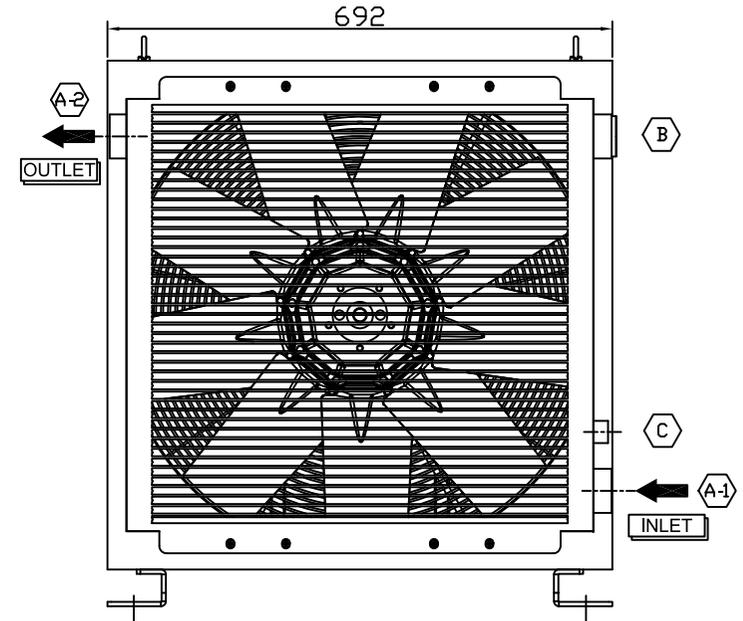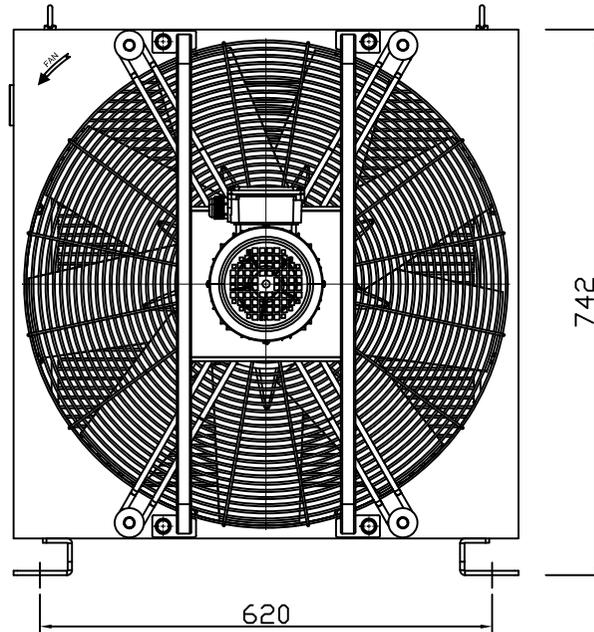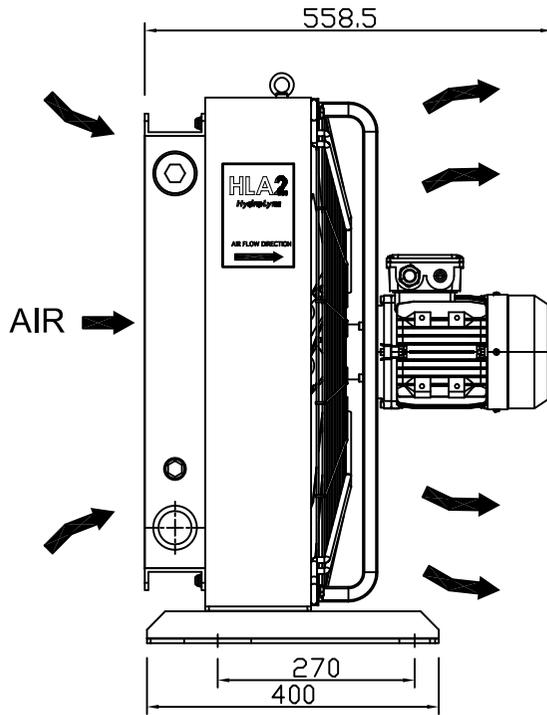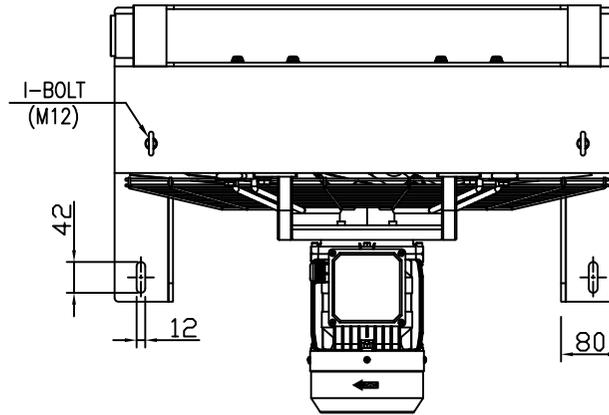


DETAIL FOR COOLER BRACKET SLOT HOLE

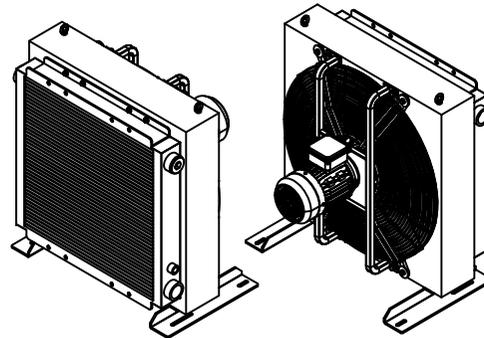

[ELECTRIC MOTOR CONNECTION DIAGRAM]

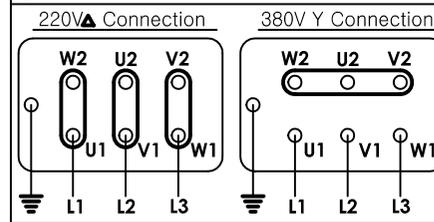

SYMBOLS FOR HYDRAULIC



DESIGN				1 OF 1
TITLE		AIR OIL COOLER		ISSUE DATE
		HLA2 35-6 (220/380V. 60hz)		
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE N / A
DRWN J.Y.MIN	19.10.17	PART NO.		A3
CHK'D		DWG NO.		REV. QTY
REV'D				REV.
APP'D				