

PORT SPECIFICATION







NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1"
(A-2)	OUTLET	G 1"
(B)	SPARE PORT	G 1/2"
(C)	THERMO S/W PORT	G 1"

[ NOTICE ]


(A-1) ↔ (B) : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on ETD 40°C)	0.19KW /°C (7.6KW, 6,536Kcal/h)
Material of Matrix	Aluminum
< GENERAL SPECIFICATION OF AIR OIL FAN COOLER >	
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Oil Flow	10lit/min ~ 130lit/min
Phase of AC Motor	3 Phase
Poles & Power of AC Motor	2 pole / 120W
Voltage & Fequency of AC Motor	230/400V 50/60Hz
Rated AC Motor Current (100% Load)	0.21A
Insullation Class	F Class
Ingress Protection	IP 54
Weight	11.7KG (Approx)

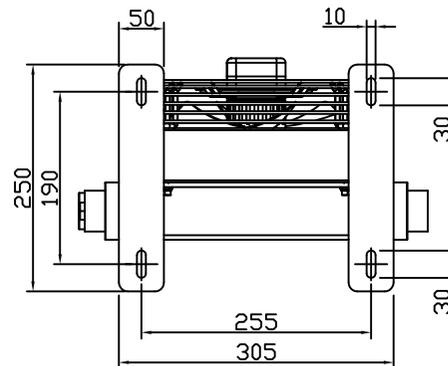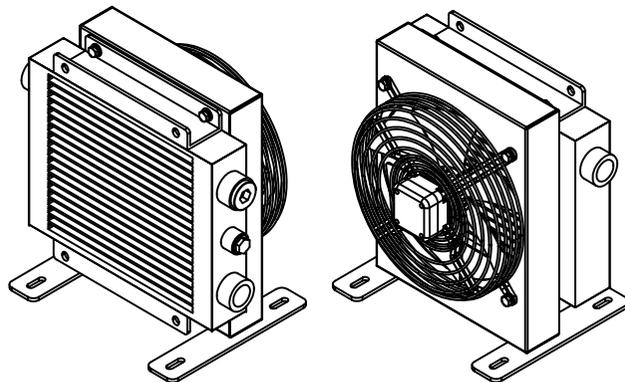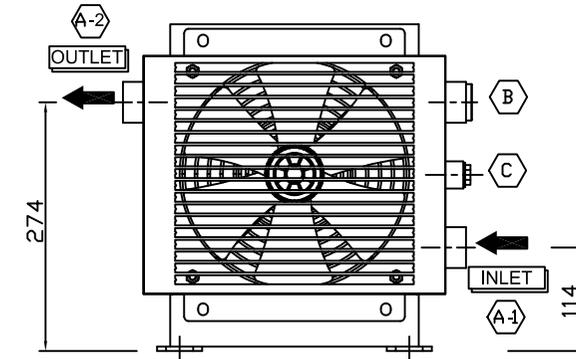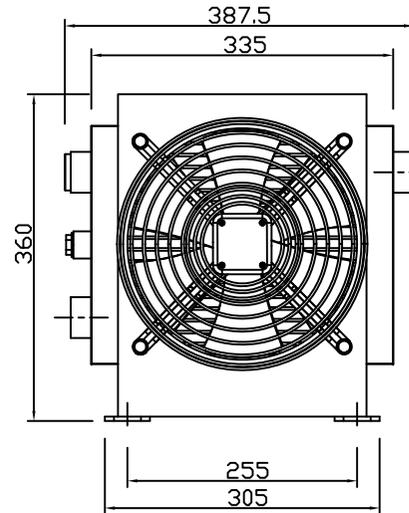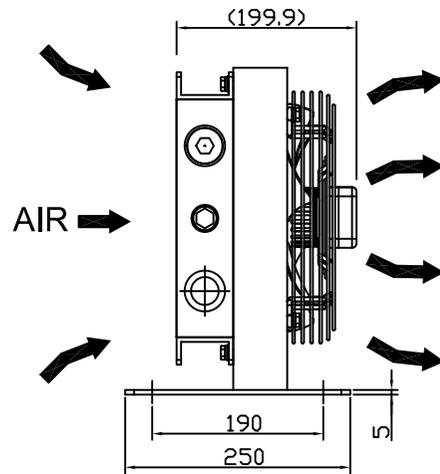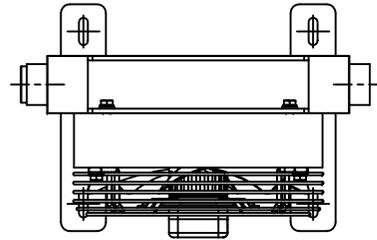

SYMBOLS FOR HYDRAULIC



DESIGN		<b>Hydro Lync</b>	
TITLE		AIR OIL COOLER HLAX 07-2 (230/400V.50/60hz / 3Phase)	
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION
DRWN	J.Y.MIN	20.09.17	SCALE N / A
CHK'D		PART NO.	A3
REV'D		DWG NO.	REV.
APP'D			