

PORT SPECIFICATION






NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1"
(A-2)	OUTLET	G 1"
(B)	SPARE PORT	G 1/2"
(C)	THERMO S/W PORT	G 1"

[ NOTICE ]


(A-1) ↔ (B) : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on ETD 40°C)	0.495KW /°C (19.8KW, 17,028Kcal/h)
Material of Matrix	Aluminum
< GENERAL SPECIFICATION OF AIR OIL FAN COOLER >	
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Oil Flow	10lit/min ~ 200lit/min
Phase of AC Motor	3 Phase
Poles & Power of AC Motor	4 pole / 220W
Voltage & Fequency of AC Motor	230/400V. 50/60Hz
Rated AC Motor Current (100% Load)	0.45A
Insullation Class	F Class
Ingress Protection	IP 54
Weight	28.2KG (Approx)

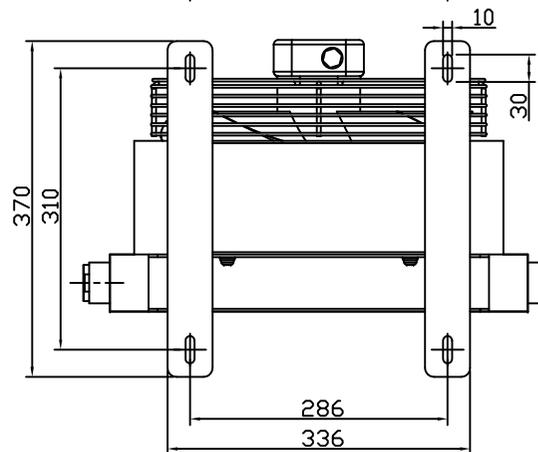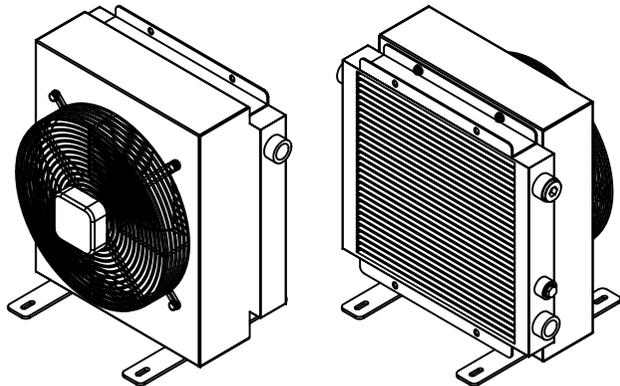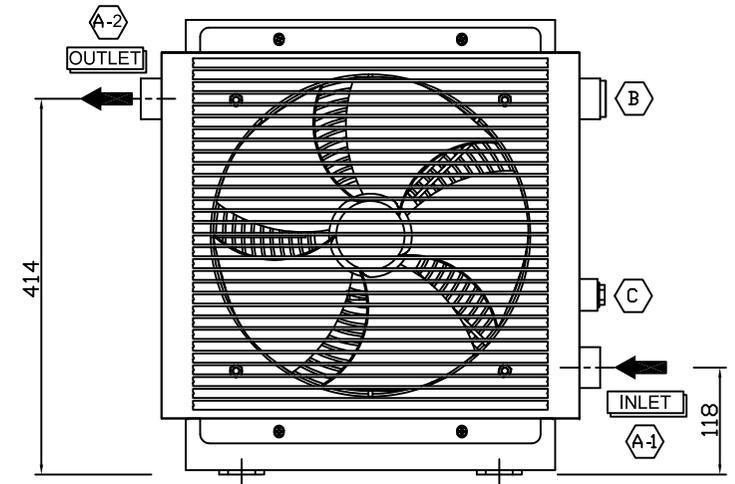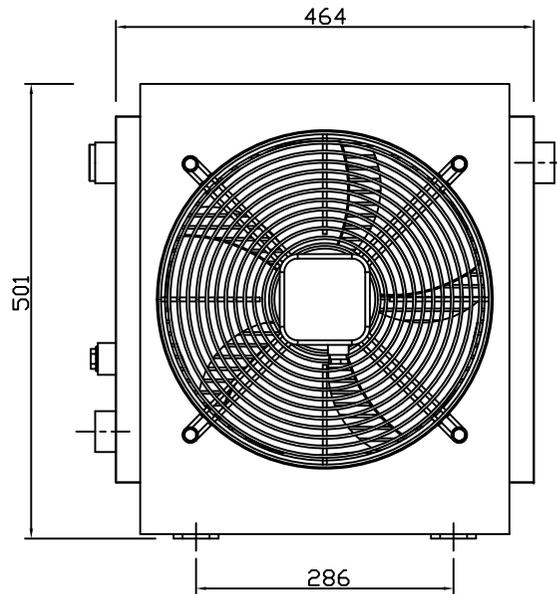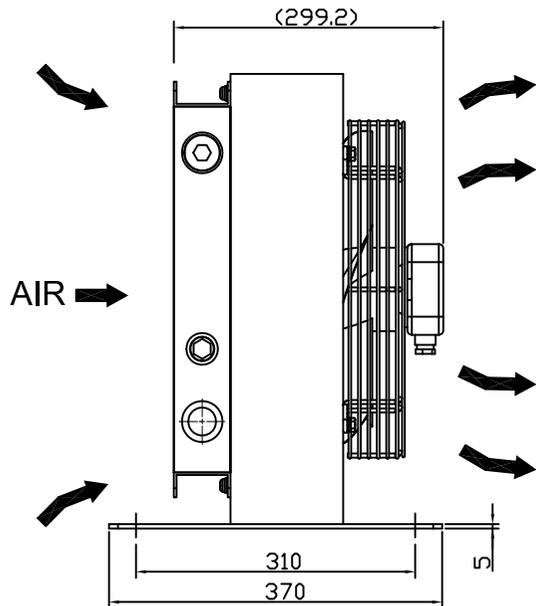

SYMBOLS FOR HYDRAULIC



DESIGN		<b>Hydro Lync</b>			
TITLE		AIR OIL COOLER HLAX 16-4 (230/400V.50/60hz / 3Phase)			
DESIGN TEAM	PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A	A3
DRWN J.Y.MIN 20.09.17					QTY
CHK'D					
REV'D					REV.
APP'D		DWG NO.			