

PORT SPECIFICATION







NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 2"
(A-2)	OUTLET	G 2"
(B)	SPARE PORT	G 2"
(C)	THERMO SW PORT	G 1/2"

[NOTICE]


(A-1) ↔ (B) : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on ETD 40°C)	1.65KW /°C (66KW, 56,760Kcal/h)
Material of Matrix	Aluminum
< GENERAL SPECIFICATION OF AIR OIL FAN COOLER >	
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Oil Flow	25lit/min ~ 400lit/min
Phase of AC Motor	3 Phase
Poles & Power of AC Motor	6 pole / 900W(Δ) / 650(Y)
Voltage & Fequency of AC Motor	230/400V, 50/60Hz
Rated AC Motor Current (100% Load)	1.90A(Δ) / 1.15(Y)
Insullation Class	F Class
Ingress Protection	IP 54
Weight	108KG (Approx)

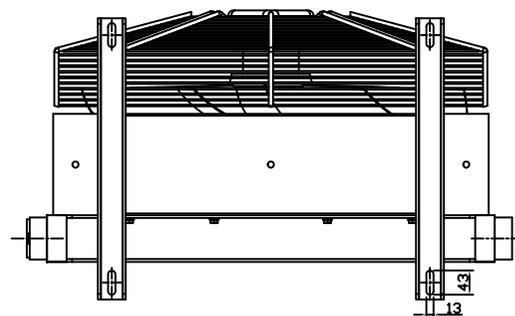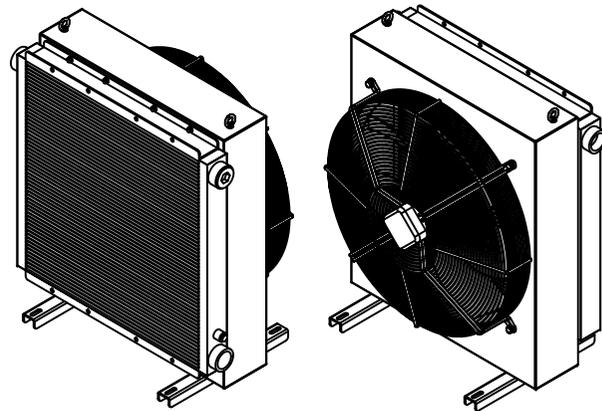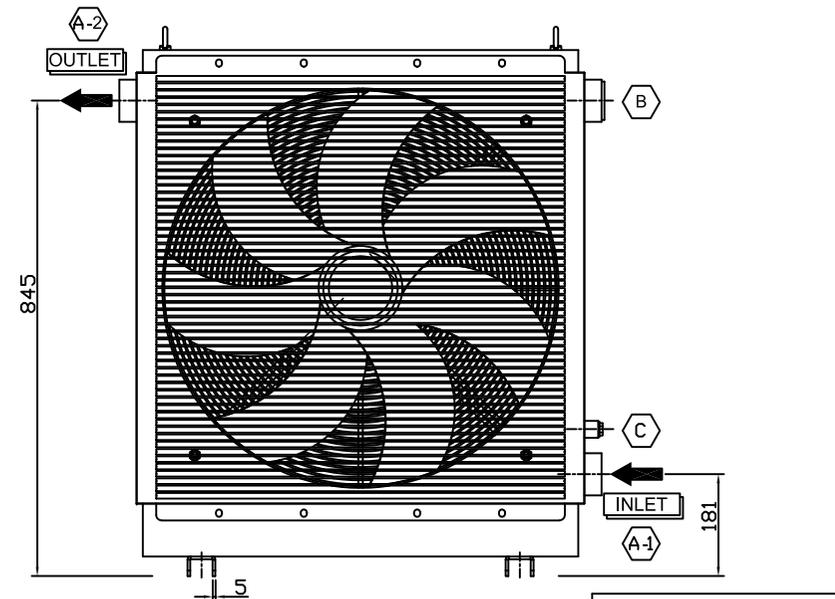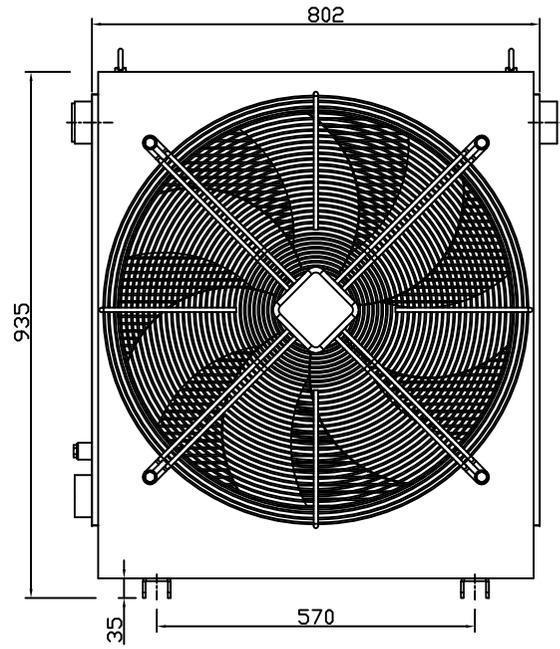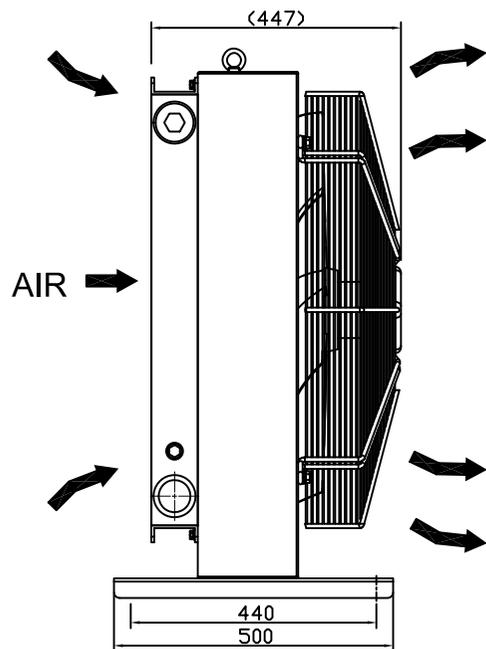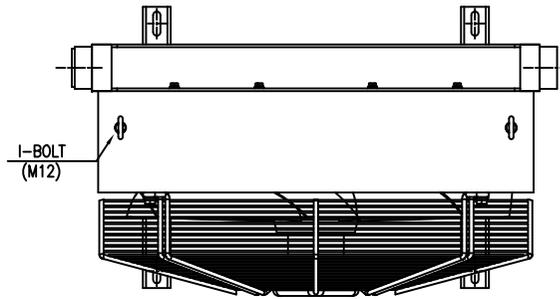

SYMBOLS FOR HYDRAULIC



DESIGN		Hydro Lync		1 OF 1
TITLE			AIR OIL COOLER	
TITLE			HLAX 58-6	
TITLE			(230/400V, 50/60hz / 3Phase)	
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE
DRWN	J.Y.MIN	20.09.17		N / A
CHK'D				A3
REV'D				QTY
APP'D			DWG NO.	REV.