
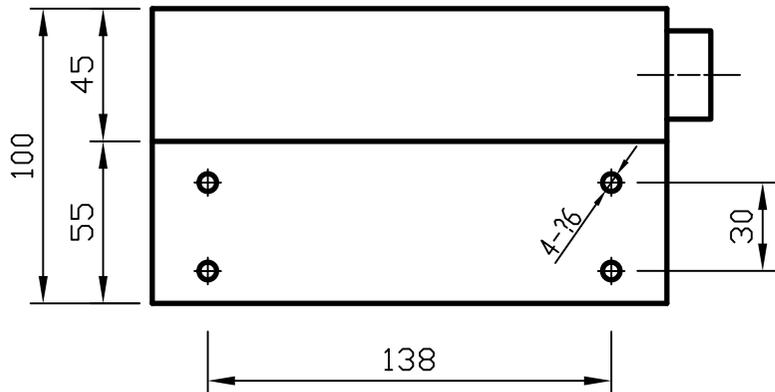
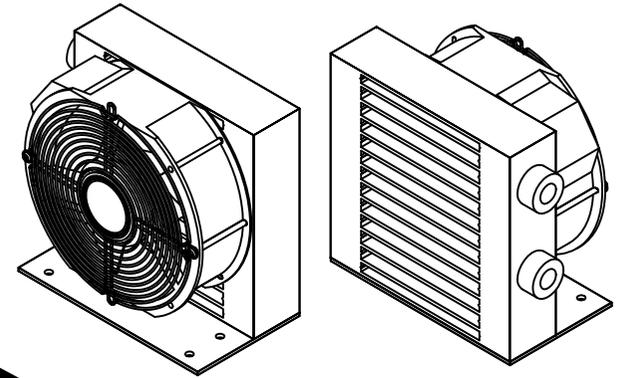
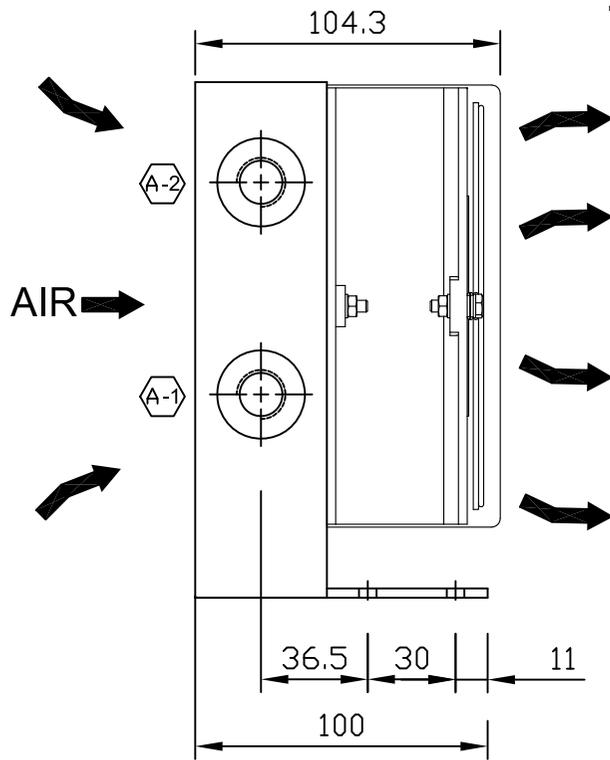



PORT SPECIFICATION		
NO	DESCRIPTION	SIZE
A-1	IN LET	PT 3/8
A-2	OUTLET	PT 3/8

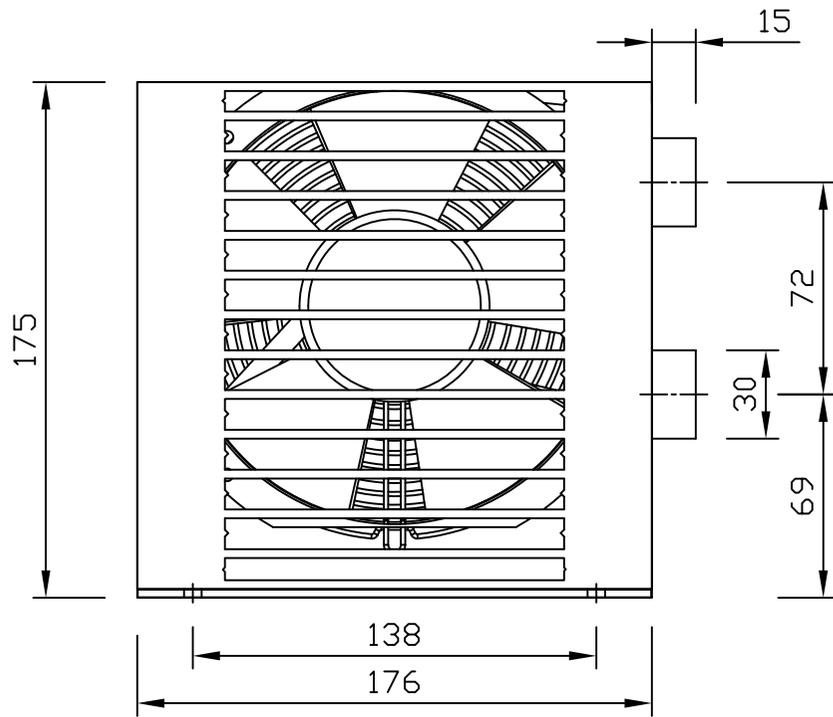

SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on ETD 40°C)	1.92KW(1,651 Kcal/h)
Material of Matrix	ALUMINUM
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	10lit/min ~ 40lit/min
Voltage of DC Motor	DC 24V
Current Consumption	0.6A
RPM	3,200 rpm
Rated Input Power	13 W
Air Flow	220 CFM
Ingress Protection	IP 44
Ambient Temp. of Motor / Operating	-10°C ~ +70°C
Ambient Temp. of DC / Storage	-40°C ~ +70°C
Noise (Noise Level tolerance ±3dB)	52db(A) 1m
Weight	2.6KG (Approx)

SYMBOLS FOR HYDRAULIC

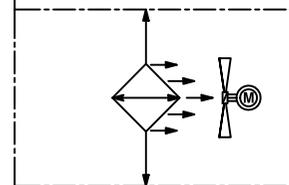

DESIGN			HydroLync		1 OF 1		
TITLE			AIR OIL COOLER		ISSUE DATE		
HLD 015-24V							
DRWN	JY.MIN	19.10.17	PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A	A3
CHK'D			PART NO.				QTY
REV'D			DWG NO.				REV.
APP'D							