
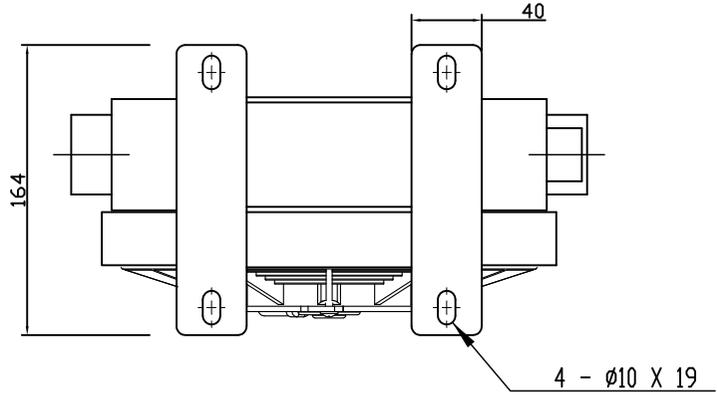
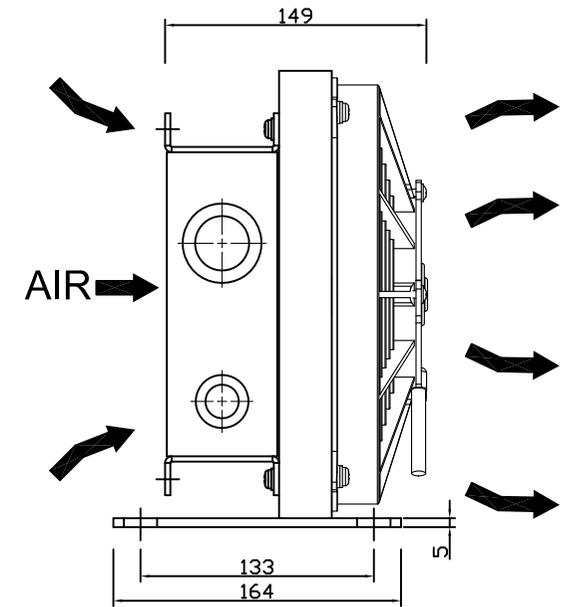
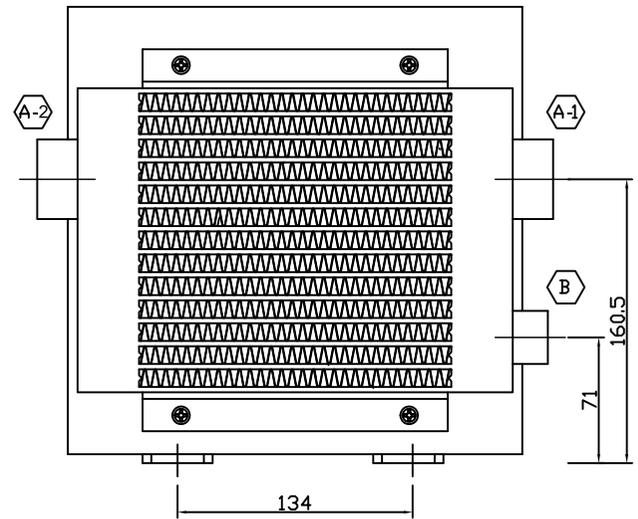
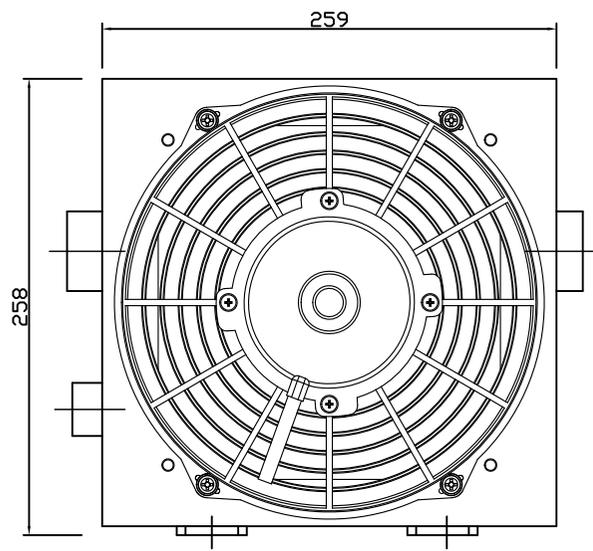
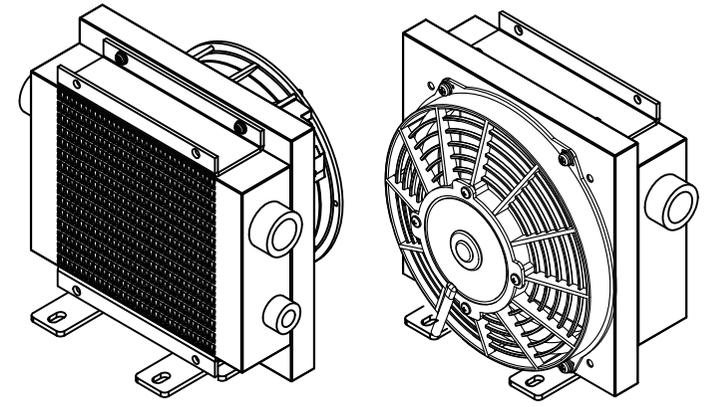
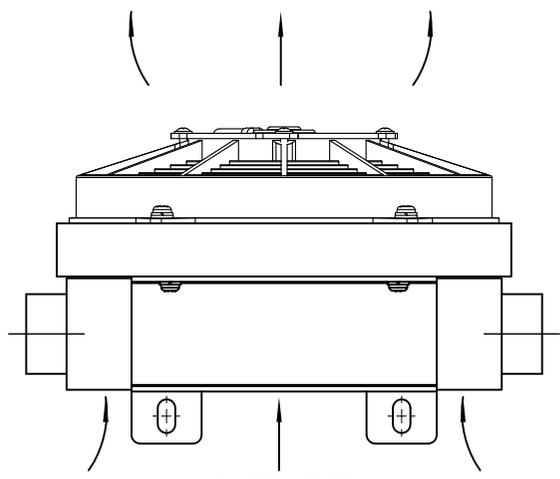


PORT SPECIFICATION		
NO	PORT DESCRIPTION	SIZE
A-1	INLET	G 1"
A-2	OUTLET	G 1"
B	THERMO S/W PORT	G 1/2"

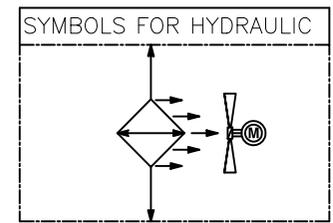

SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on ETD 40°C)	2,752 Kcal/h
Material of Matrix	ALUMINUM
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	10lit/min ~ 100lit/min
Voltage of DC Motor	DC 24V
Current Consumption	4A
RPM	3,350 rpm
Ingress Protection	IP 68
Ambient Temp. of DC Motor	-30°C ~ +80°C
Noise (Noise Level tolerance ±3dB)	68db(A) 1m
Weight	5.7KG (Approx)

DESIGN		Hydro Lync		1 OF 1	
TITLE			AIR OIL COOLER		ISSUE DATE
			HLD 03-24V		
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A
DRWN	JY.MIN 19.10.17	METHOD			A3
CHK'D		PART NO.			Q'TY
REV'D		DWG NO.			REV.
APP'D					