
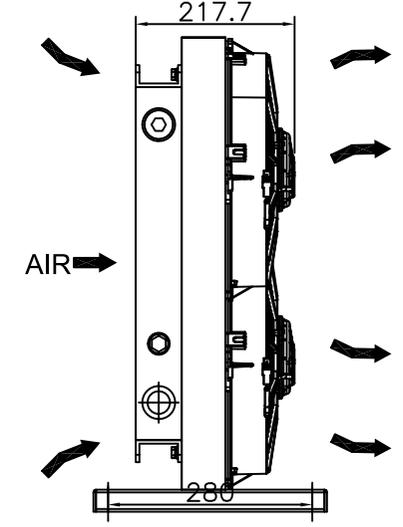
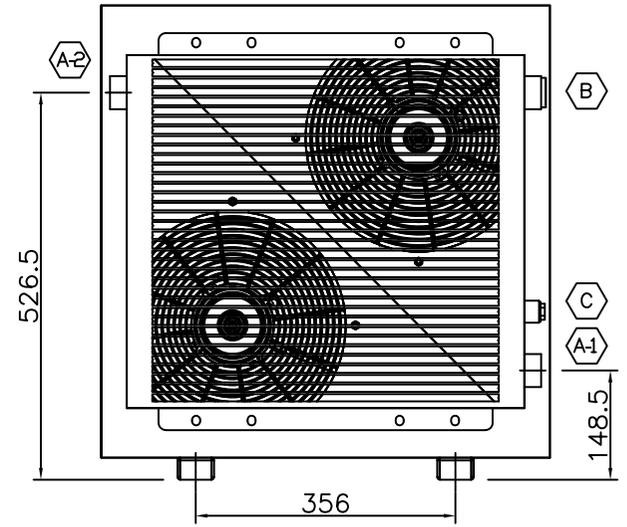
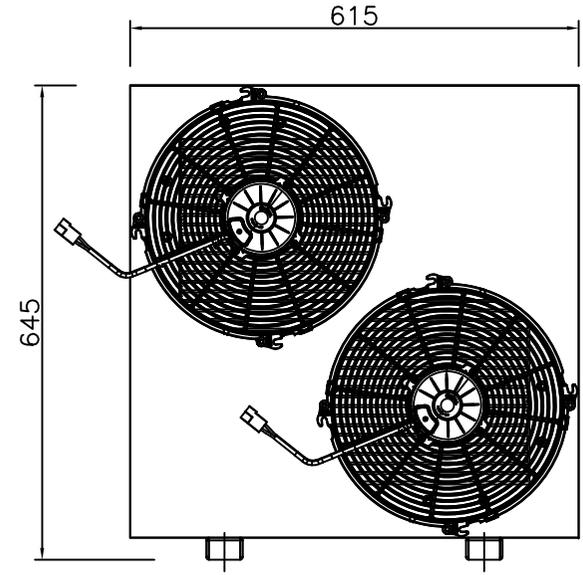
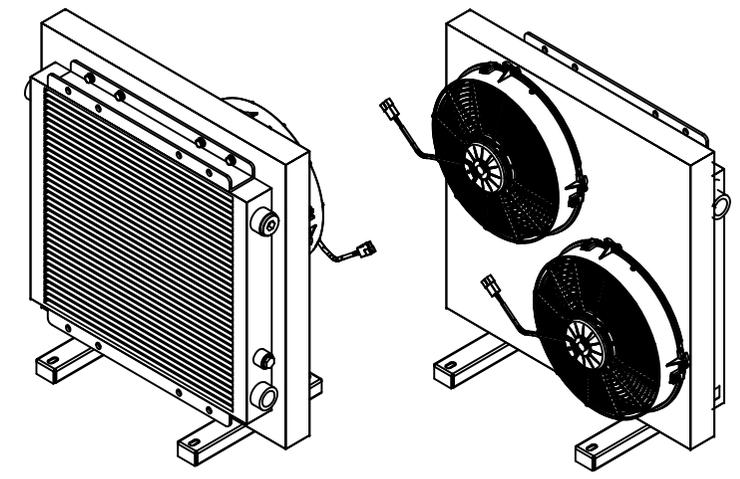


PORT SPECIFICATION		
NO.	PORT DESCRIPTION	SIZE
A-1	INLET	G 1"
A-2	OUTLET	G 1"
B	SPARE PORT	G 1"
C	THERMO S/W PORT	G 1/2"


[NOTICE]

A-1 ↔ B : INCORRECT CONNECTION

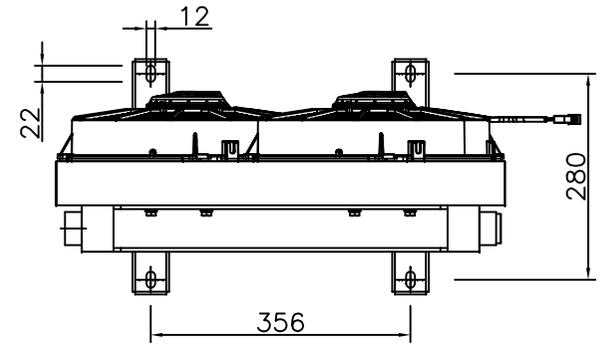


SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on ETD 40°C)	20,640 Kcal/h
Material of Matrix	ALUMINUM
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	10lit/min ~ 200Lit/min
Voltage of DC Motor	DC 24V
Current Consumption	10A x 2
RPM	3,060 rpm
Ingress Protection	IP 68
Ambient Temp. of DC Motor	-30°C ~ +80°C
Noise (Noise Level tolerance ±3dB)	77db(A) 1m
Weight	25KG (Approx)

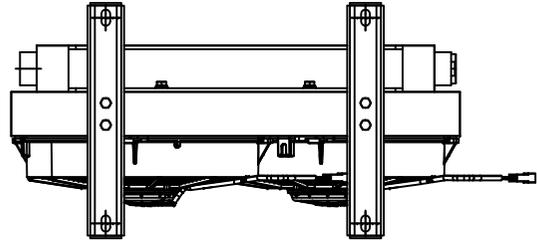

SYMBOLS FOR HYDRAULIC



DESIGN		Hydro Lync		1 OF 1	
TITLE			AIR OIL COOLER		ISSUE DATE
			HLD 23-24V		
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A
DRWN	J.Y.MIN	19.08.13	PART NO.		QTY
CHK'D					
REV'D			DWG NO.		REV.
APP'D					