

PORT SPECIFICATION







NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1"
(A-2)	OUTLET	G 1"
(B)	SPARE PORT	G 1/2"
(C)	THERMO S/W PORT	G 1"

[ NOTICE ]


(A-1) ↔ (B) : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on 3,000rpm & ETD 40°C)	15,308Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	10lit/min ~ 150lit/min
Displacement of Hyd' Motor	11 cm <sup>3</sup> /rev
Max. Working pressure of Hyd' Motor	210 bar
Max. Speed of Hyd' Motor	3,500 rpm
Noise / LpA, 1m (Based on 3,000rpm)	82db
Weight	17KG (Approx)

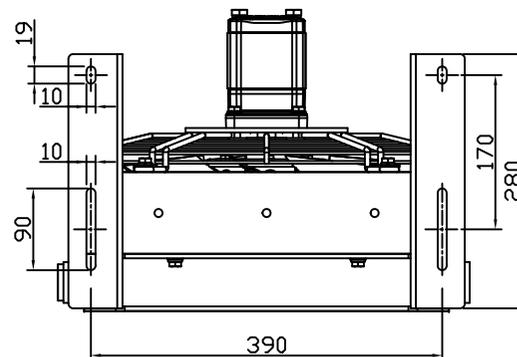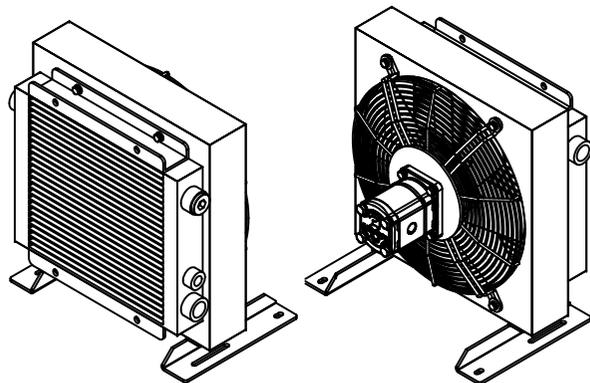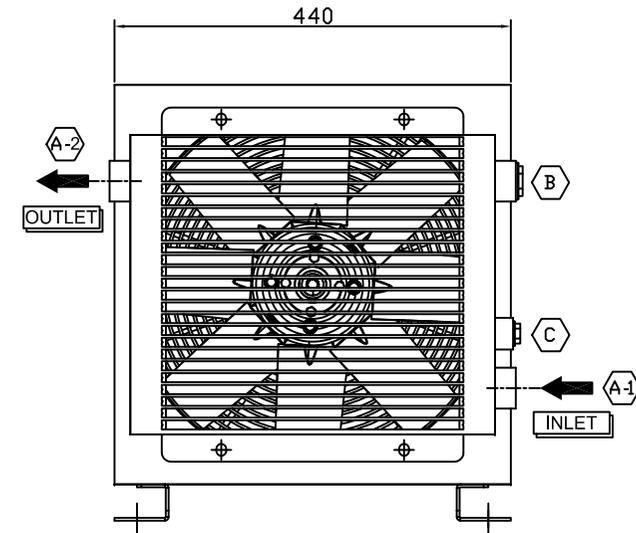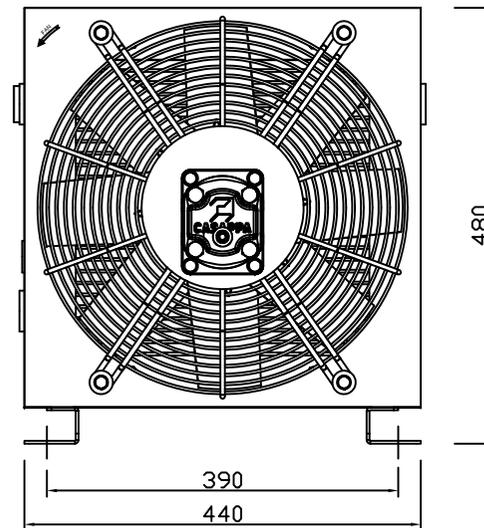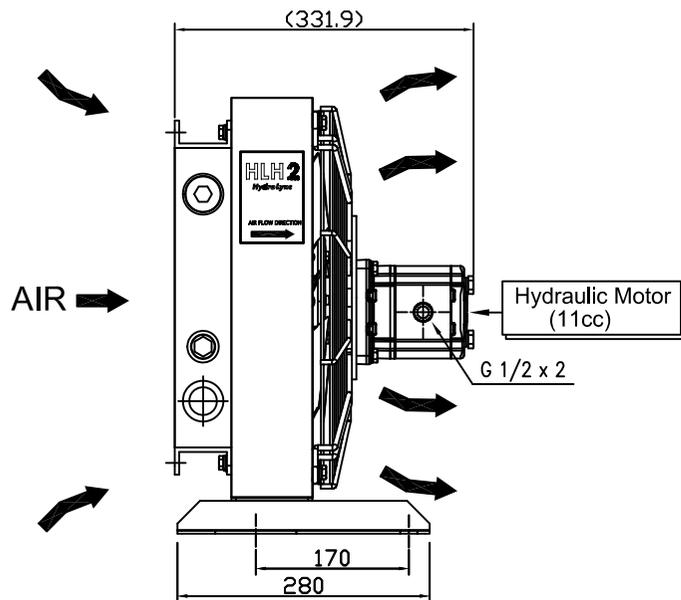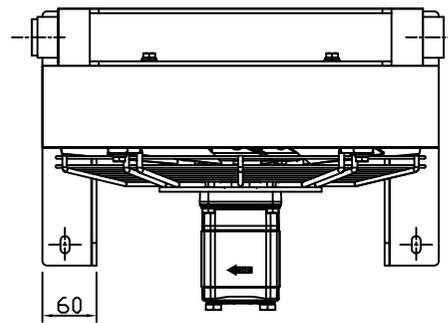

SYMBOLS FOR HYDRAULIC

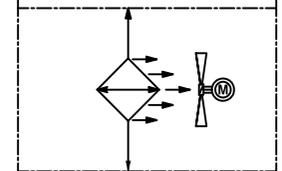

DESIGN			
TITLE			
AIR OIL COOLER			
HLH2 11-11cc			
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION
DRWN	J.Y.MIN	20.07.15	SCALE N / A
CHK'D		PART NO.	A3
REV'D			QTY
APP'D		DWG NO.	REV.