

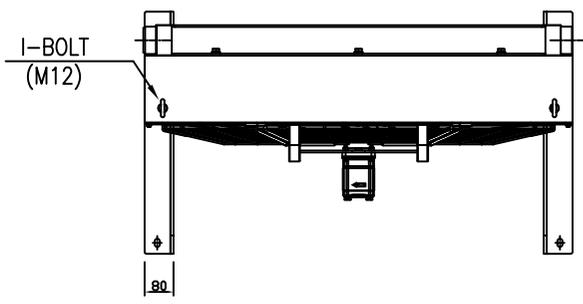
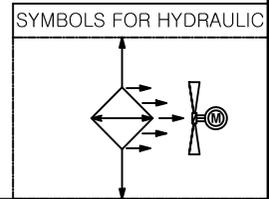
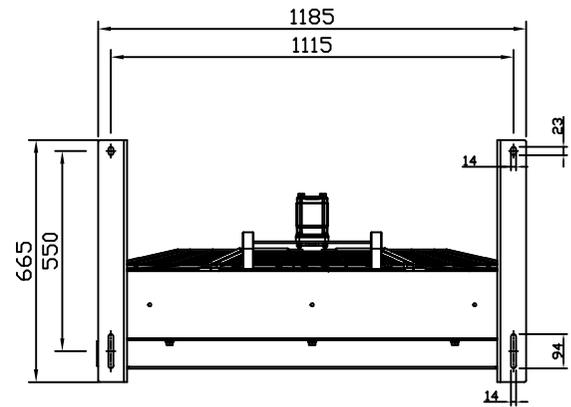
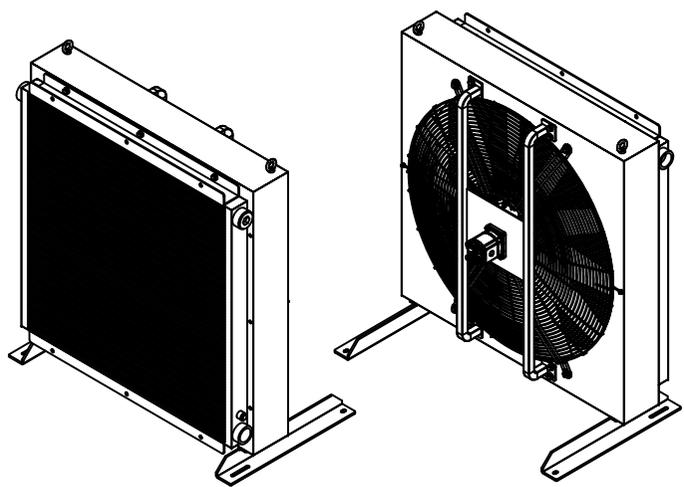
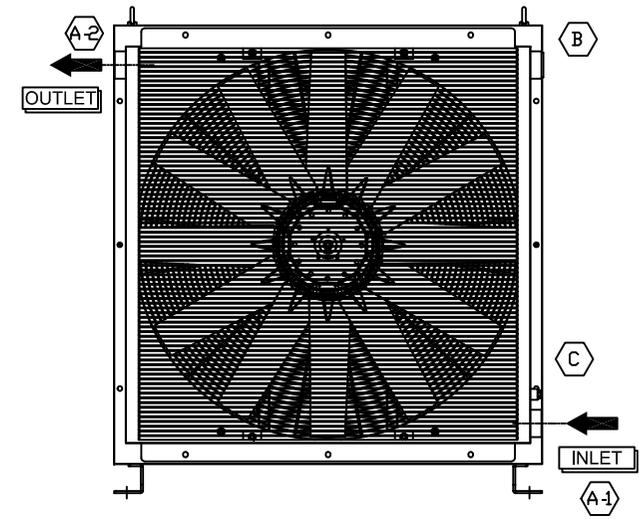


PORT SPECIFICATION		
NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 2"
(A-2)	OUTLET	G 2"
(B)	SPARE PORT	G 2"
(C)	THERMO S/W PORT	G 1/2"

[NOTICE]
 (A-1) ↔ (B) : INCORRECT CONNECTION

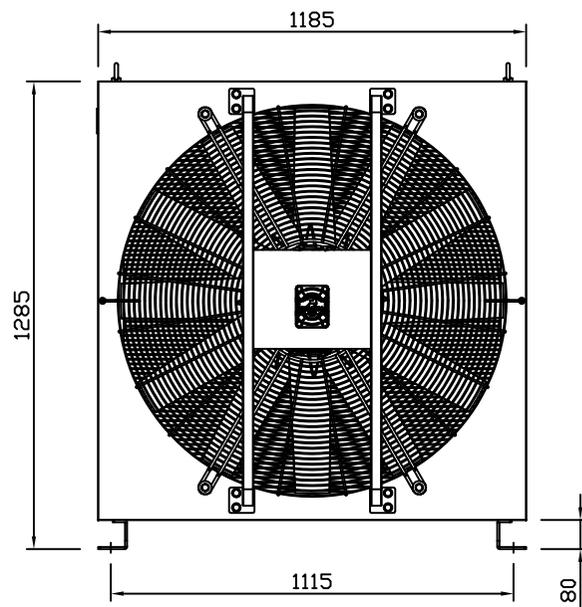

SPECIFICATION OF AIR OIL COOLER	
Cooling Capacity (Based on 1,000rpm & ETD 40°C)	116,960Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	50lit/min ~ 500lit/min
Displacement of Hyd' Motor	11 cm3/rev
Max. Working pressure of Hyd' Motor	210 bar
Max. Speed of Hyd' Motor	1,440 rpm
Noise / LpA, 1m (Based on 1,000rpm)	92db
Weight	133KG (Approx)

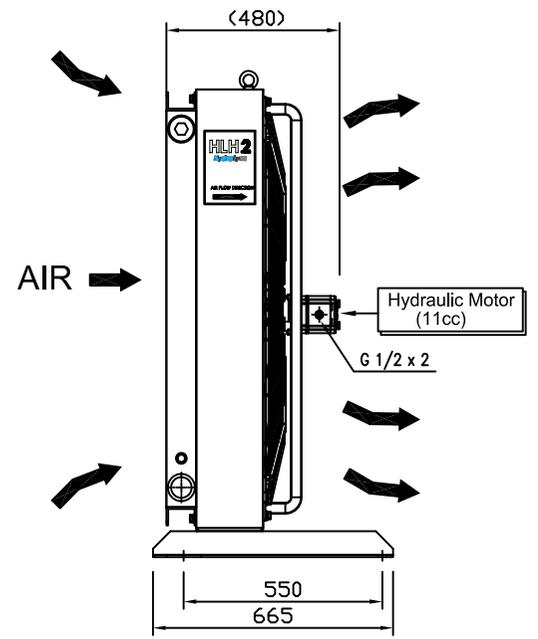

DESIGN		1 OF 1	
TITLE			ISSUE DATE
AIR OIL COOLER			
HLH2 112-11cc			
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION
DRWN	J.Y.MIN 20.07.15	SCALE	N / A
CHK'D		PART NO.	A3
REV'D		DWG NO.	QTY
APP'D			REV.