

PORT SPECIFICATION







NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1"
(A-2)	OUTLET	G 1"
(B)	SPARE PORT	G 1"
(C)	THERMO S/W PORT	G 1/2"

[NOTICE]


(A-1) ↔ (B) : INCORRECT CONNECTION

SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on 3,000rpm & ETD 40°C)	22,360Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	10lit/min ~ 200lit/min
Displacement of Hyd' Motor	11 cm3/rev
Max. Working pressure of Hyd' Motor	210 bar
Max. Speed of Hyd' Motor	3,500 rpm
Noise / LpA, 1m (Based on 3,000rpm)	86db
Weight	20KG (Approx)

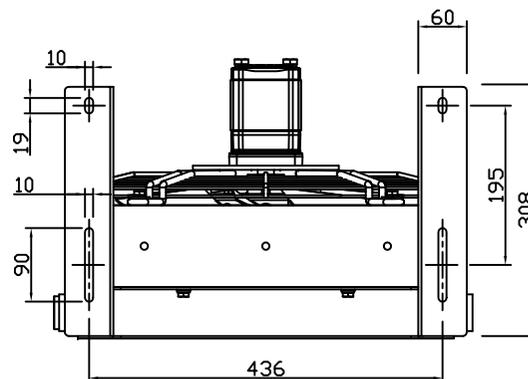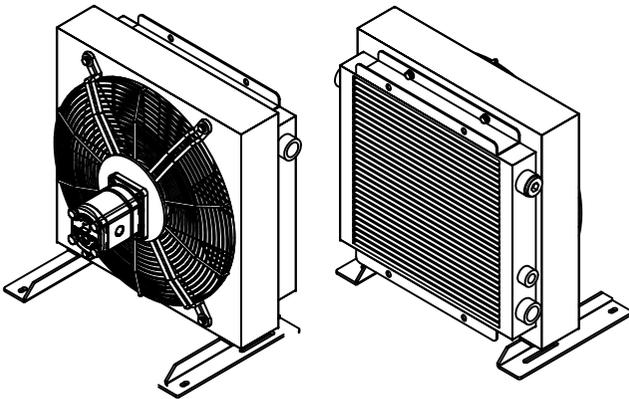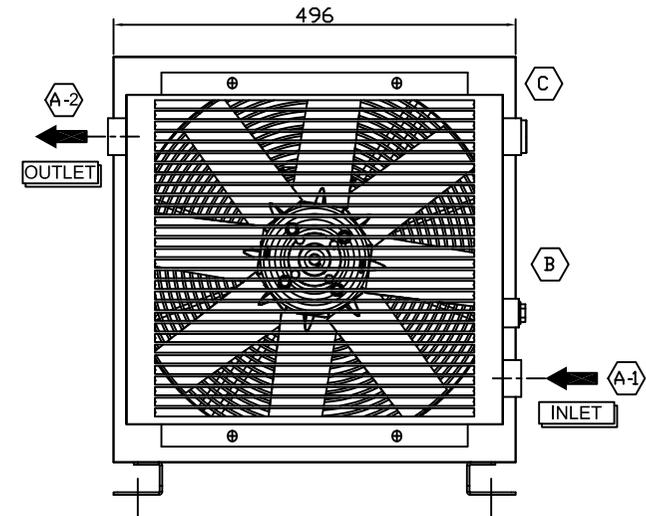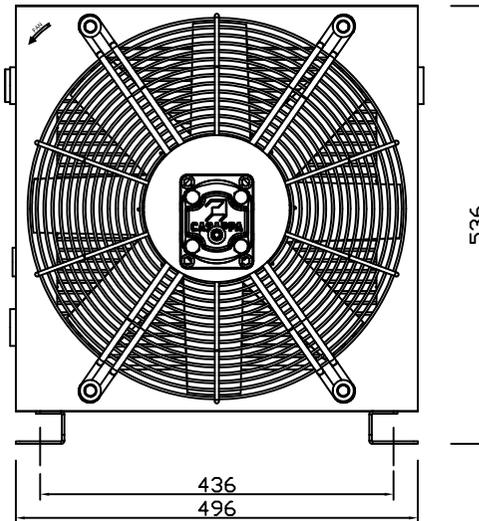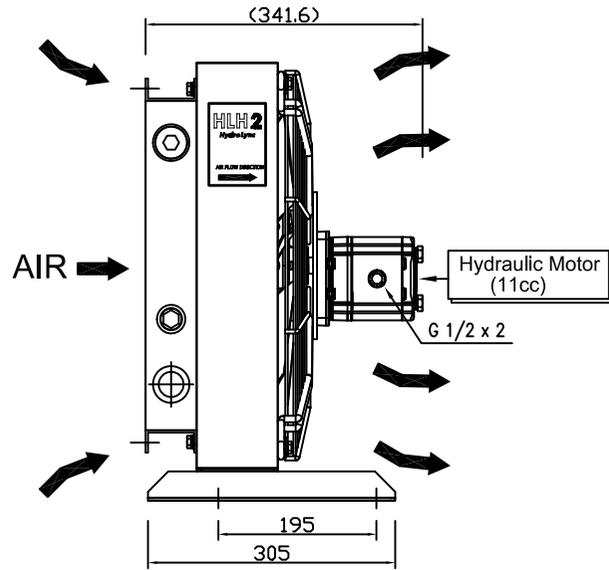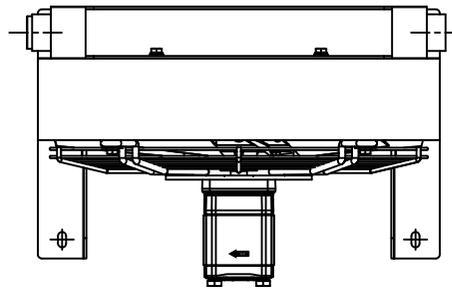

SYMBOLS FOR HYDRAULIC



DESIGN		Hydro Lync		1 OF 1	
TITLE				ISSUE DATE	
AIR OIL COOLER					
HLH2 16-11cc					
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A
DRWN	J.Y.MIN	20.07.15			A3
CHK'D					QTY
REV'D					REV.
APP'D			DWG. NO.		