








PORT SPECIFICATION		
NO.	PORT DESCRIPTION	SIZE
(A-1)	INLET	G 1 1/4"
(A-2)	OUTLET	G 1 1/4"
(B)	SPARE PORT	G 1 1/4"
(C)	THERMO S/W PORT	G 1/2"

[ NOTICE ]

(A-1) ↔ (B) : INCORRECT CONNECTION

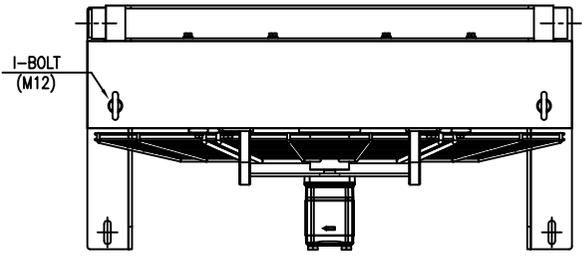

SPECIFICATION OF AIR OIL COOLER	
Cooling Capacity (Based on 1,000rpm & ETD 40°C)	51,600Kcal/h
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Oil Flow	25lit/min ~ 300lit/min
Displacement of Hyd' Motor	11 cm3/rev
Max. Working pressure of Hyd' Motor	210 bar
Max. Speed of Hyd' Motor	1,850 rpm
Noise / LpA, 1m (Based on 1,000rpm)	82db
Weight	73KG (Approx)

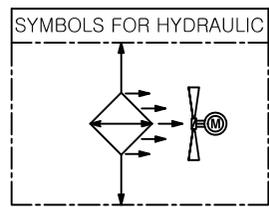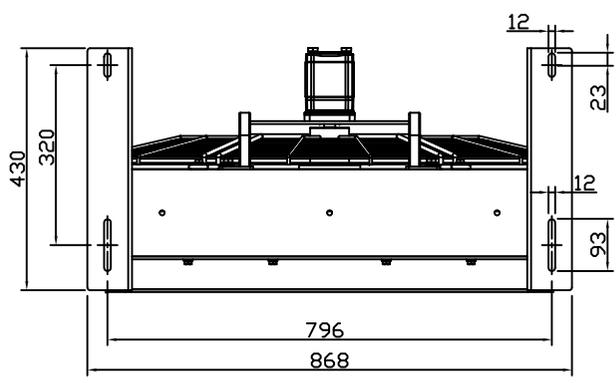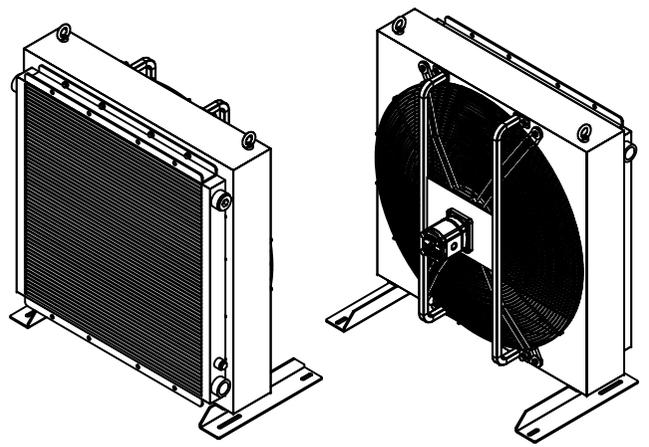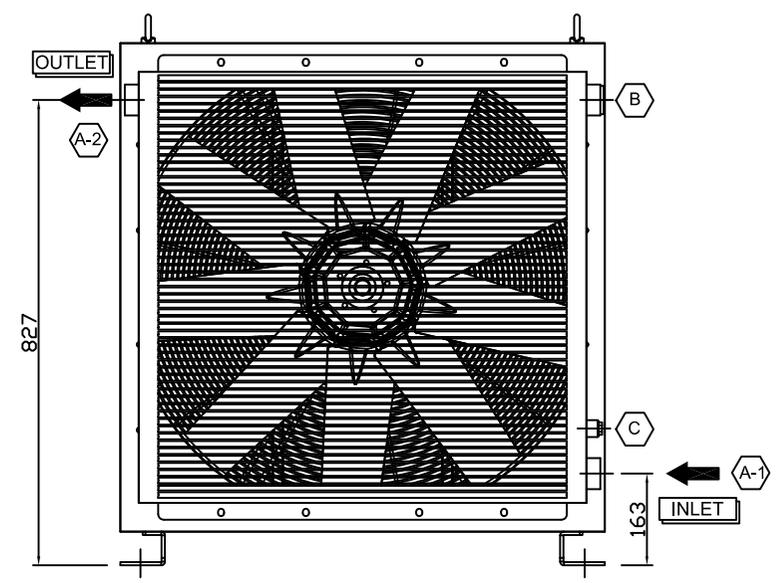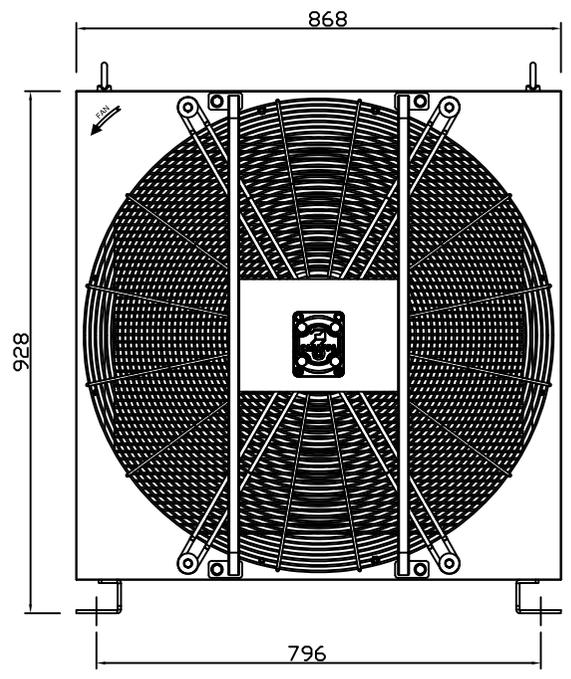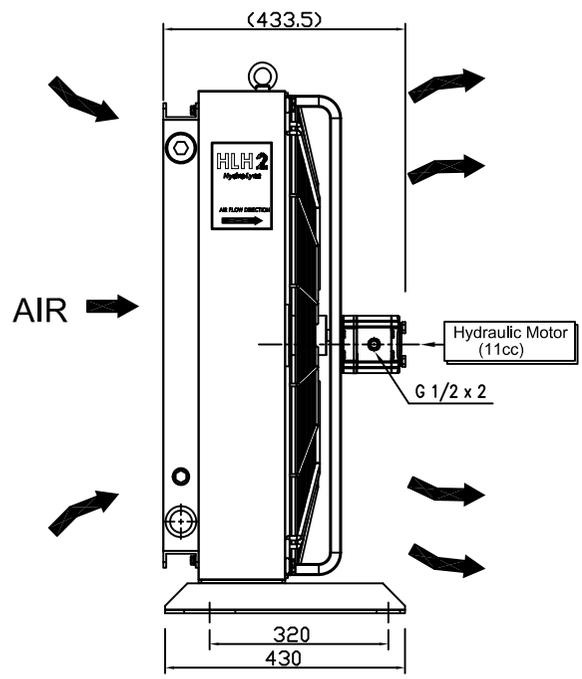

DESIGN		<b>Hydro Lync</b>		1 OF 1	
TITLE				ISSUE DATE	
AIR OIL FAN COOLER					
HLH2 56-11 cc					
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A
DRWN	J.Y.MIN	20.07.15			A3
CHK'D					QTY
REV'D					REV.
APP'D			DWG NO.		