
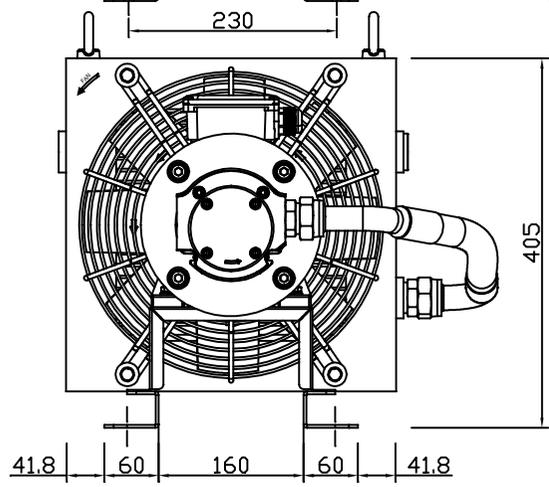
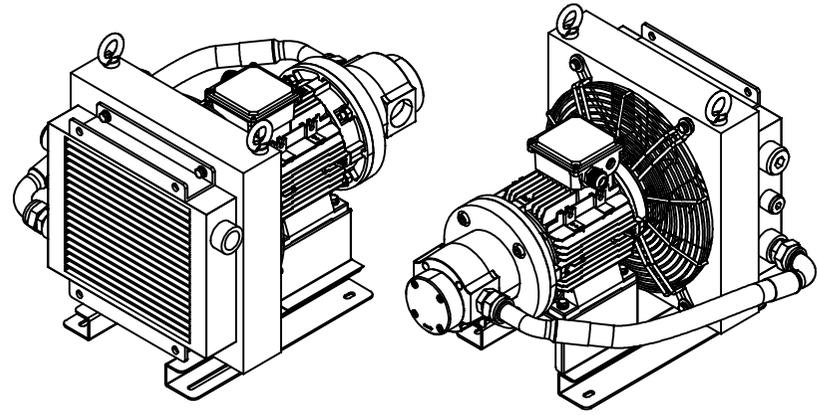
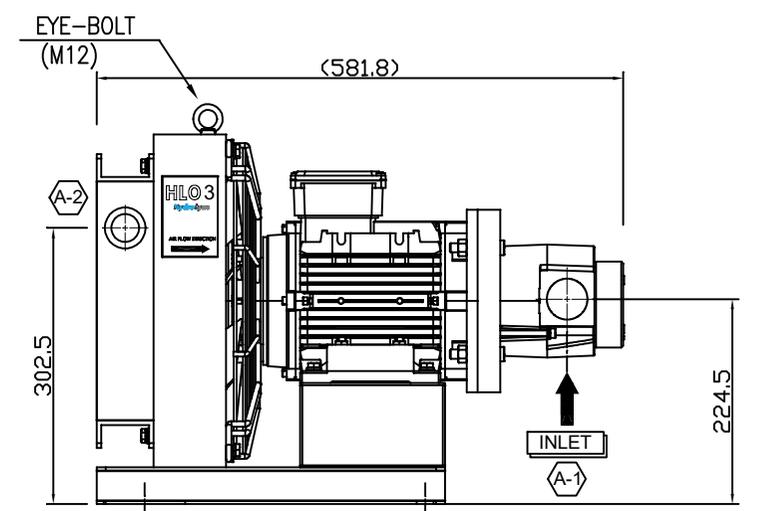
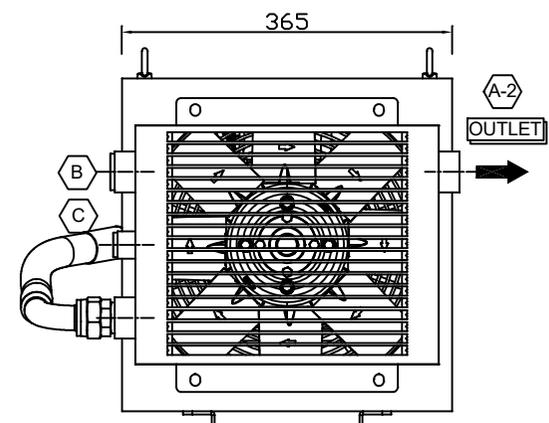
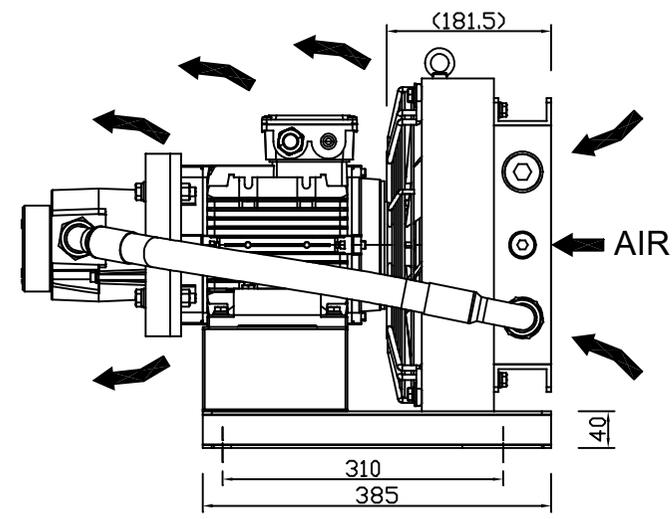



PORT SPECIFICATION		
NO.	PORT DESCRIPTION	SIZE
A-1	INLET	G 1 1/2"
A-2	OUTLET	G 1"
B	SPARE PORT-1	G 1"
C	SPARE PORT-2	G 1/2"

SPECIFICATION OF AIR OIL COOLER	
Cooling Capacity (Based on ETD 40°C)	0.09 KW/°C
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Volume of Circulation Pump	13.8 cm <sup>3</sup> / rev
Oil Flow Rate of Circulation Pump (at 60hz 1,720rpm)	24 Lit/min
Poles & Power of AC Motor	4 pole / 2.2KW
Voltage & Fequency of AC Motor	220/380/440V. 60Hz
Insullation Class	F Class
Ingress Protection	IP 55
Weight	33.5KG (Approx)

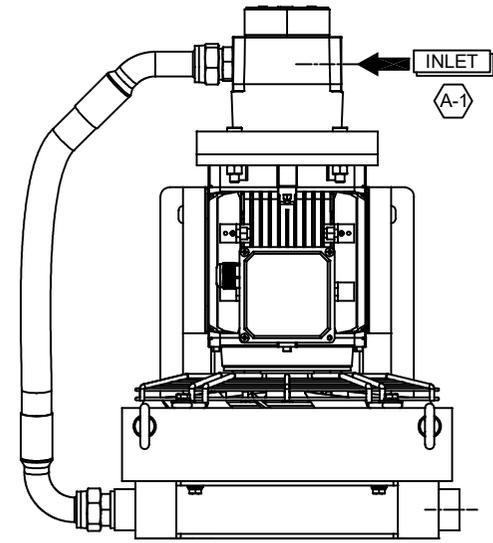

2-Ø10x90  
SLOT HOLE

2-Ø10x19  
SLOT HOLE

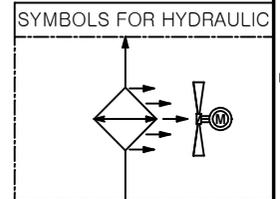

DESIGN							
TITLE						AIR OIL COOLER	
						HLO2 07-4-20L	
						(220/380/440V. 60hz)	
DESIGN TEAM			PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A	A3
DRWN	J.Y.MIN	20.10.31					Q'TY
CHK'D			PART NO.				
REV'D			DWG NO.				REV.
APP'D							