
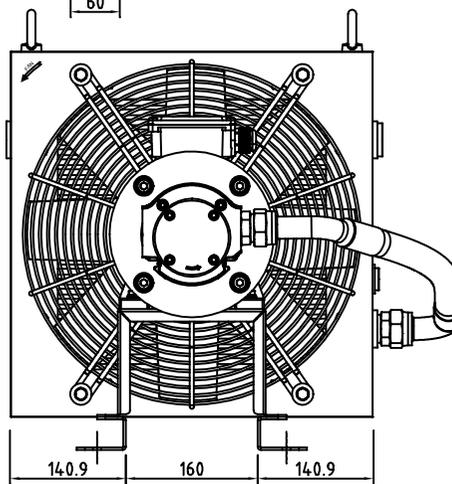
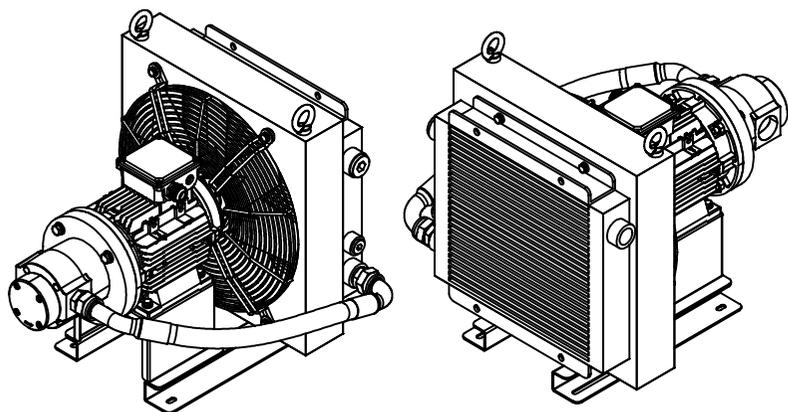
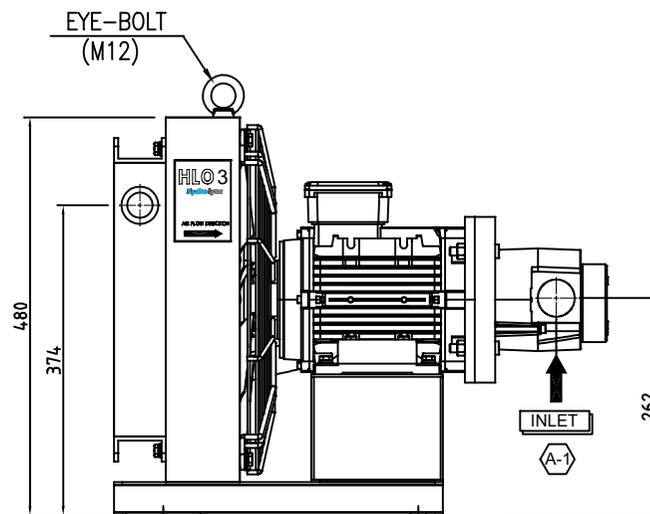
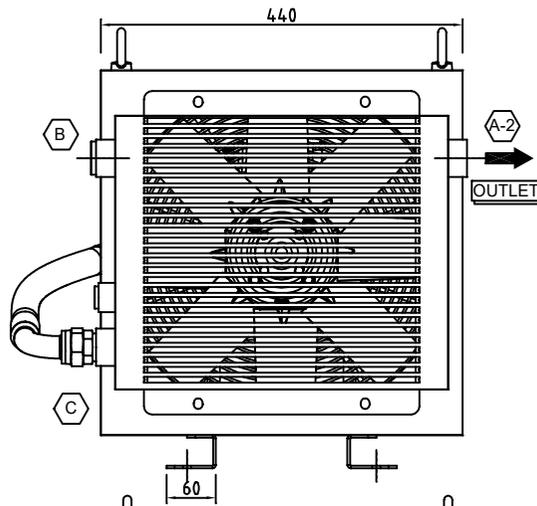
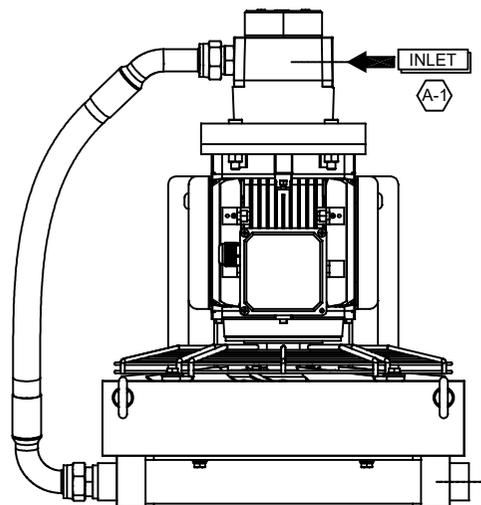


PORT SPECIFICATION

N.O.	PORT DESCRIPTION	SIZE
A-1	INLET	G 1 1/2"
A-2	OUTLET	G 1"
B	SPARE PORT-1	G 1"
C	SPARE PORT-2	G 1/2"


SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based On ETD 40°C)	0.13 KW/°C
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Volume of Circulation Gerotor Pump	13.8 cm ³ / rev.
Oil Flow Rate of Circulation Pump	24 Lit/min
Poles & Power of AC Motor	4 pole / 2.2KW
Voltage & Fequency of AC Motor	220/380/440V 60Hz
Insulation Class	F Class
Ingress Protection	IP 55
Weight	38.5KG (Approx)

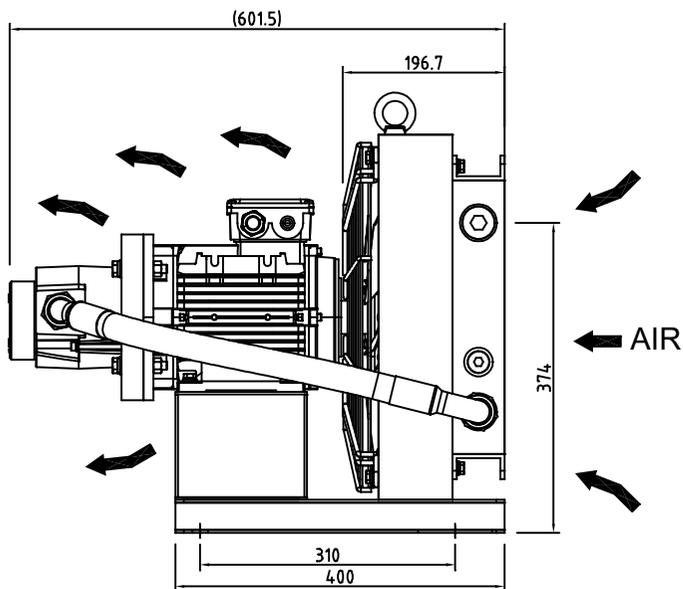

DETAIL FOR COOLER BRACKET SLOT HOLE

SYMBOLS FOR HYDRAULIC



DESIGN			
TITLE		AIR OIL COOLER HLO3 11-4-20L (220/380/440V. 60hz)	
DESIGN TEAM		PROJECTION METHOD	SCALE
DRWN	J.Y.MIN 25.10.31	THIRD ANGLE PROJECTION	N / A
CHK'D		PART NO.	A3
REV'D		DWG NO.	Q'TY
APP'D			REV.