
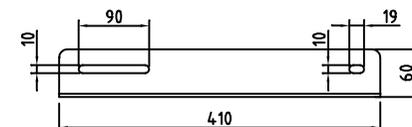
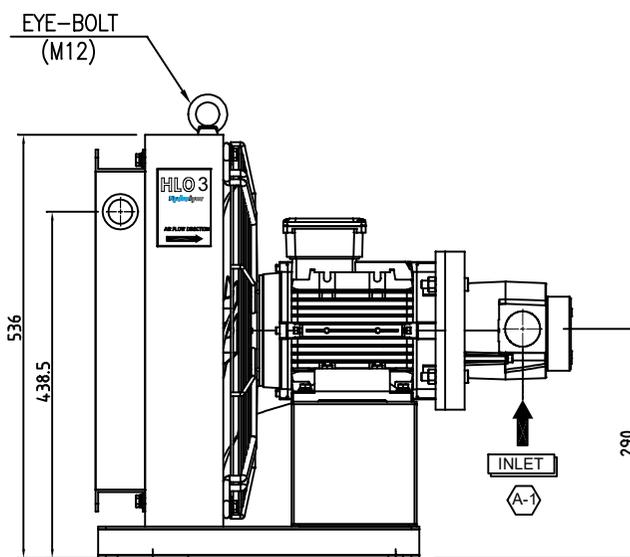
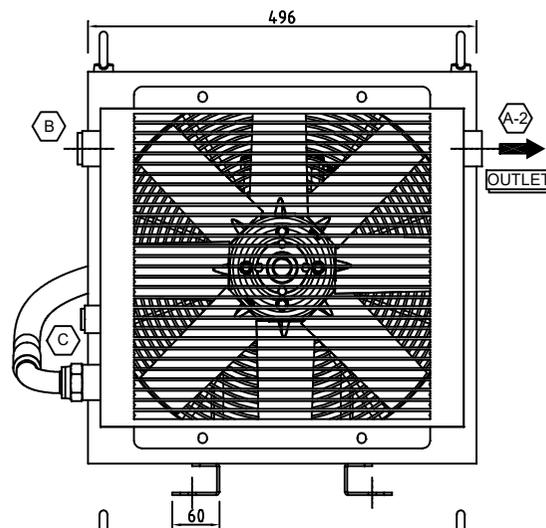
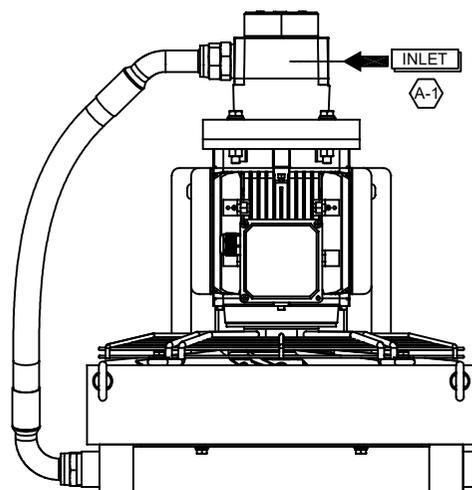


PORT SPECIFICATION

N.O.	PORT DESCRIPTION	SIZE
A-1	INLET	G 1 1/2"
A-2	OUTLET	G 1"
B	SPARE PORT-1	G 1"
C	SPARE PORT-2	G 1/2"




SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on ETD 40°C)	0.19 KW/°C
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Volume of Circulation Pump	13.8 cm ³ / rev
Oil Flow Rate of Circulation Pump (at 60hz 1,720 rpm)	24 Lit/min
Poles & Power of AC Motor	4 pole / 2.2KW
Voltage & Fequency of AC Motor	220/380/440V. 60Hz
Insullation Class	F Class
Ingress Protection	IP 55
Weight	42.5KG (Approx)

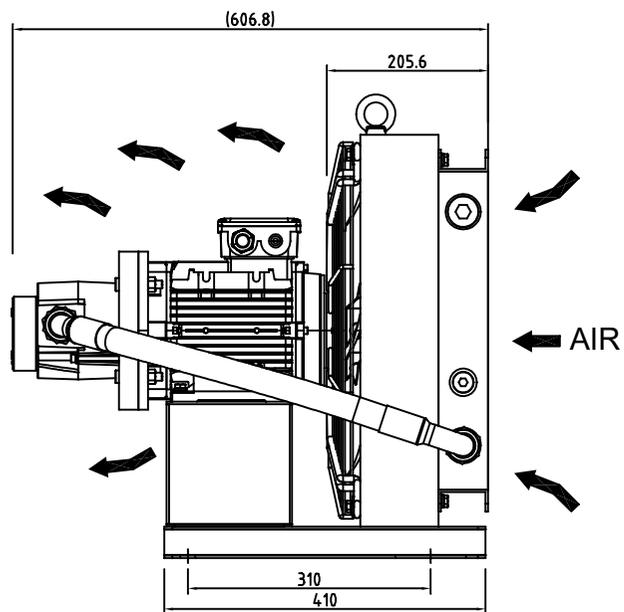

DETAIL FOR COOLER BRACKET SLOT HOLE

SYMBOLS FOR HYDRAULIC

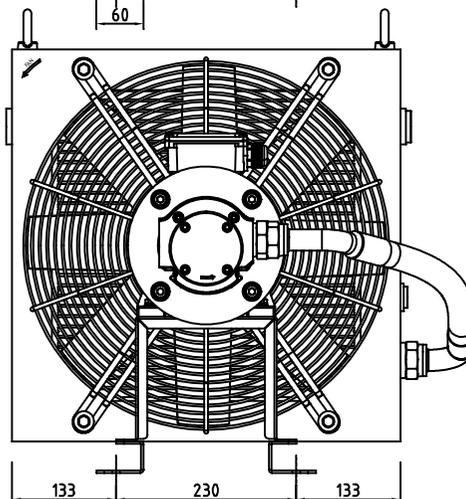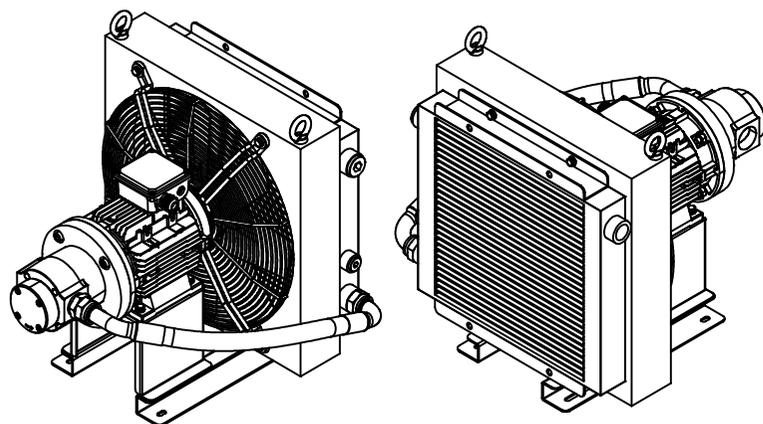

DESIGN			
TITLE		AIR OIL COOLER HLO3 16-4-20L (220/380/440V. 60hz)	
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION
DRWN	J.Y.MIN 25.10.31	SCALE	N / A
CHK'D		PART NO.	
REV'D		DWG NO.	
APP'D			
			A3 Q'TY REV. ◆