

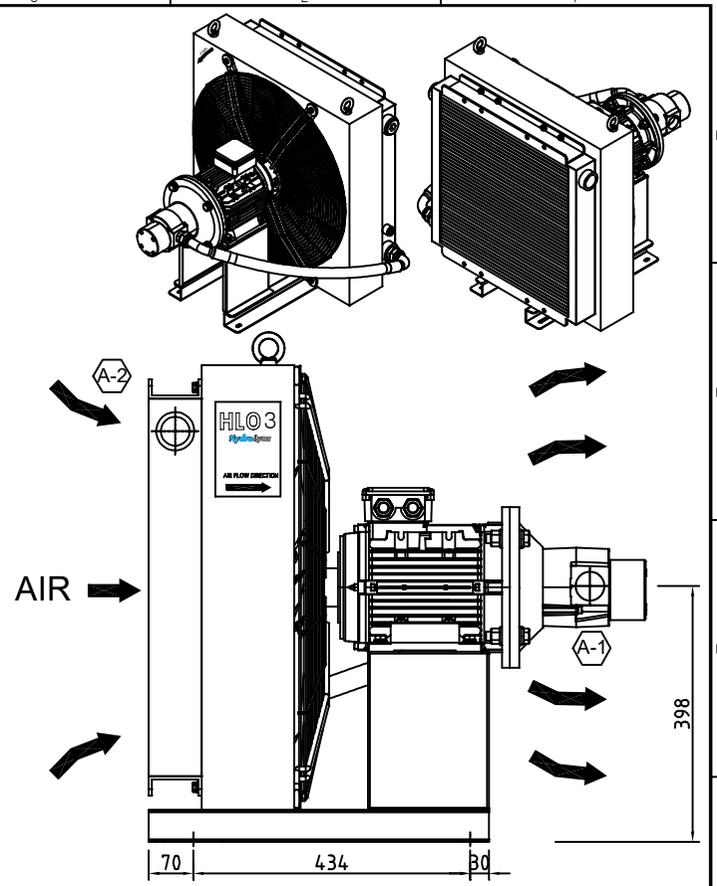
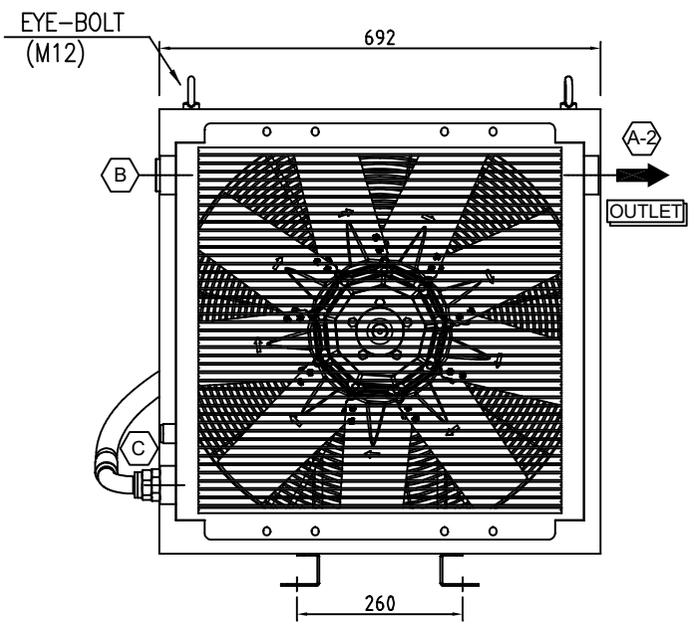
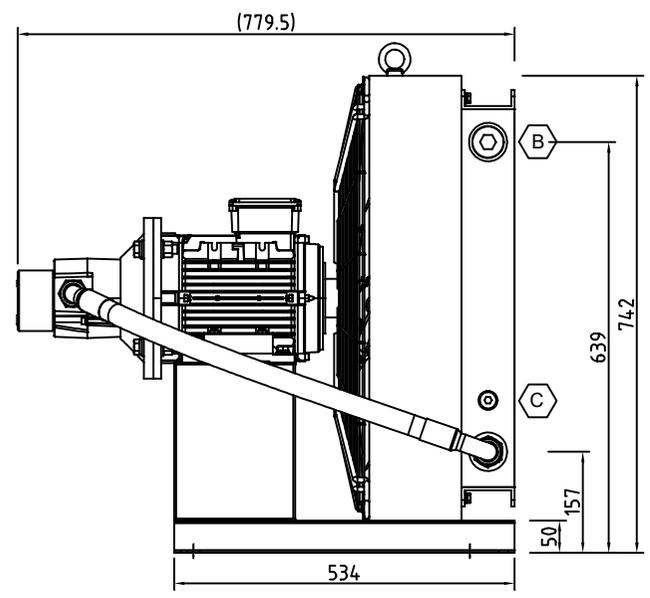
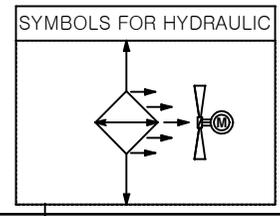


PORT SPECIFICATION		
NO.	PORT DESCRIPTION	SIZE
A-1	PUMP INLET	G 1 1/2"
A-2	COOLER OUTLET	G 1 1/2"
B	SPARE PORT - 1	G 1 1/2"
C	SPARE PORT - 2	G 1/2"

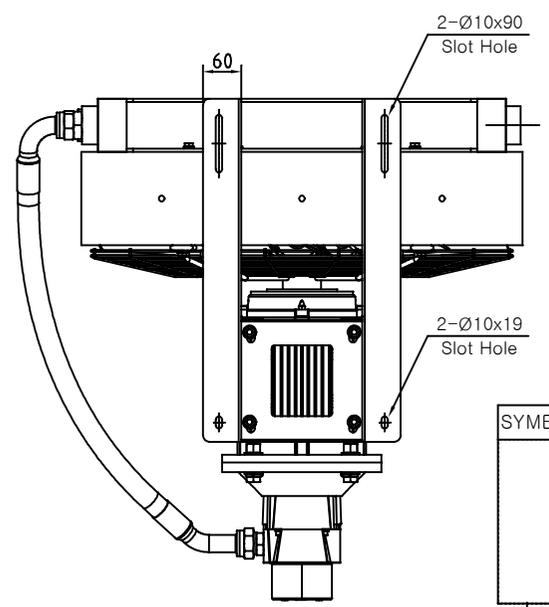

SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on ETD 40°C)	0.68KW/°C
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Volume of Circulation Pump	41 cm ³ / rev
Oil Flow Rate of Circulation Pump	70 Lit/min
Poles & Power of AC Motor	4 pole / 4.0KW
Voltage & Fequency of AC Motor	220/380/440V 60Hz
Insulation Class	F Class
Ingress Protection	IP 55
Weight	83.5KG (Approx)

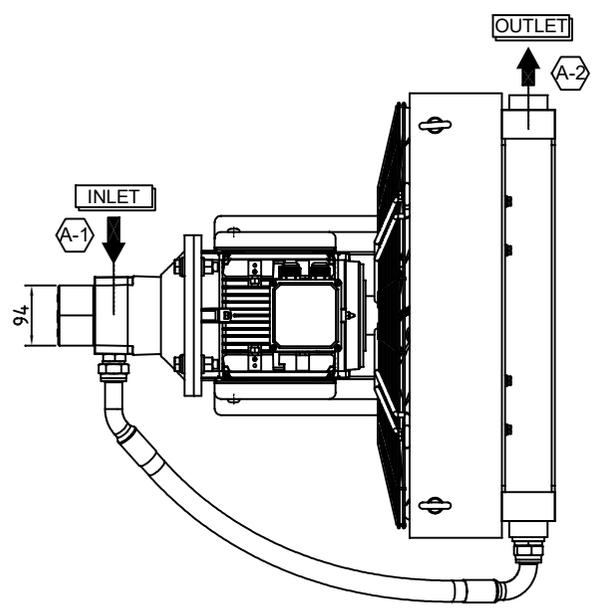

DESIGN		Hydro Lync		1 OF 1
TITLE		AIR OIL COOLER HLO3 35-4-60L (220/380/440V. 60hz)		ISSUE DATE
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE N / A
DRWN	JY.MIN 25.10.31	PART NO.		A3
CHK'D				Q'TY
REV'D		DWG NO.		REV.
APP'D				