

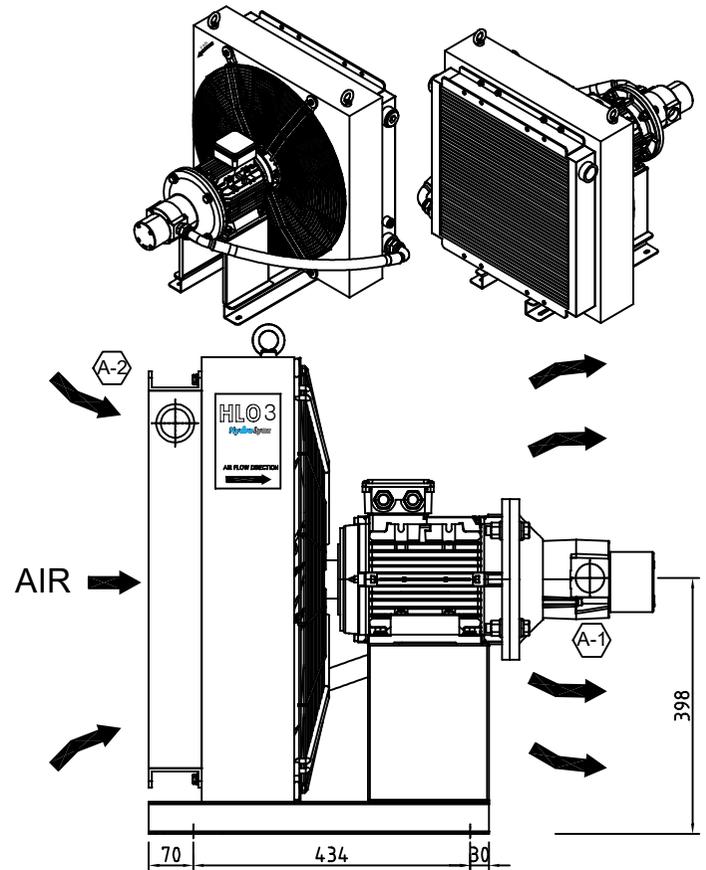
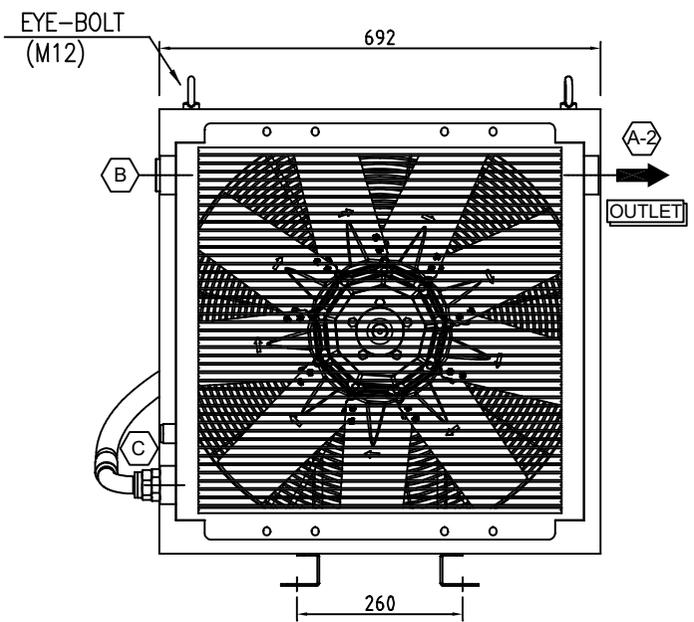
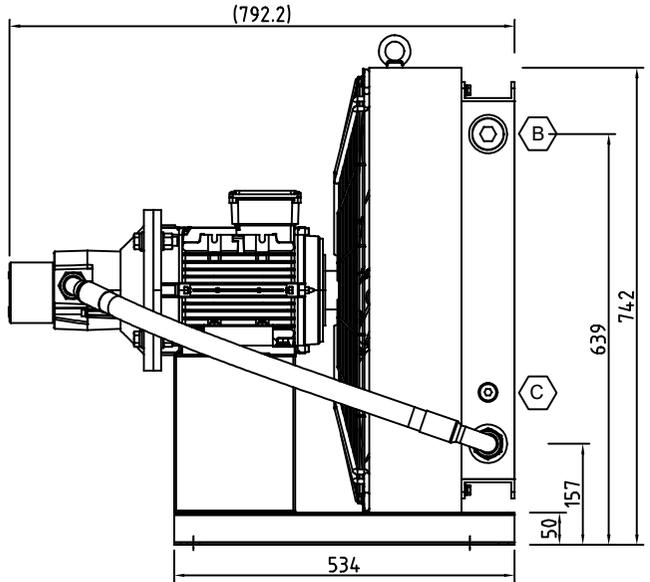
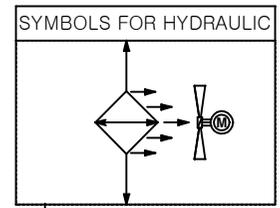


PORT SPECIFICATION		
N.O.	PORT DESCRIPTION	SIZE
A-1	PUMP INLET	G 1 1/2"
A-2	COOLER OUTLET	G 1 1/2"
B	SPARE PORT - 1	G 1 1/2"
C	SPARE PORT - 2	G 1/2"

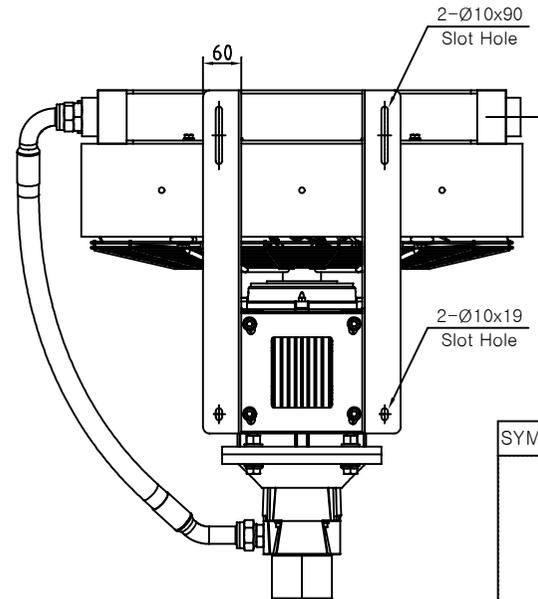

SPECIFICATION OF AIR OIL COOLER

Cooling Capacity (Based on ETD 40°C)	0.77KW/°C
Material of Matrix	Aluminum
Test Pressure	21 bar
Dynamic Working Pressure	14 bar
Maximum oil inlet temperature	120°C
Direction of Cooling Air	Suction Type
Volume of Circulation Pump	55 cm ³ / rev
Oil Flow Rate of Circulation Pump	94 Lit/min
Poles & Power of AC Motor	4 pole / 4.0KW
Voltage & Fequency of AC Motor	220/380/440V 60Hz
Insulation Class	F Class
Ingress Protection	IP 55
Weight	84KG (Approx)

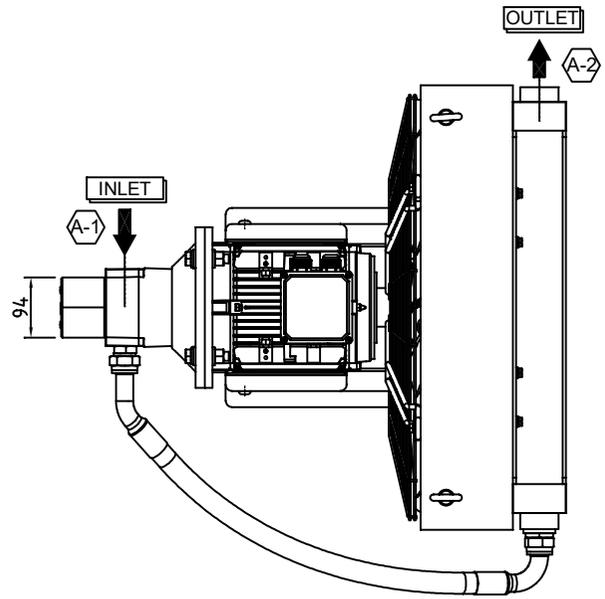

DESIGN		Hydro Lync		1 OF 1
TITLE			ISSUE DATE	
AIR OIL COOLER				
HLO3 35-4-80L				
(220/380/440V. 60hz)				
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE
DRWN	JY.MIN 25.10.31			N / A
CHK'D		PART NO.		A3
REV'D		DWG NO.		Q'TY
APP'D				REV.